

Surface Mount Schottky Barrier Diode

(Pb) Lead(Pb)-Free


Features:

- *Low Turn-on Voltage
- *Fast Switching
- *PN Junction Guard Ring for Transient and ESD Protection

MECHANICAL DATA


- *Case : SOT-346, Molded Plastic
- *Terminals : Solderable per MIL-STD-202, Method 208
- *Polarity : See Diagrams Below
- *Weight : 0.008 grams (approx.)
- *Mounting Position : Any

**SCHOTTKY BARRIER
RECTIFIERS
0.5AMPERES
20-40VOLTS**



SC-59

SC-59 Outline Dimension

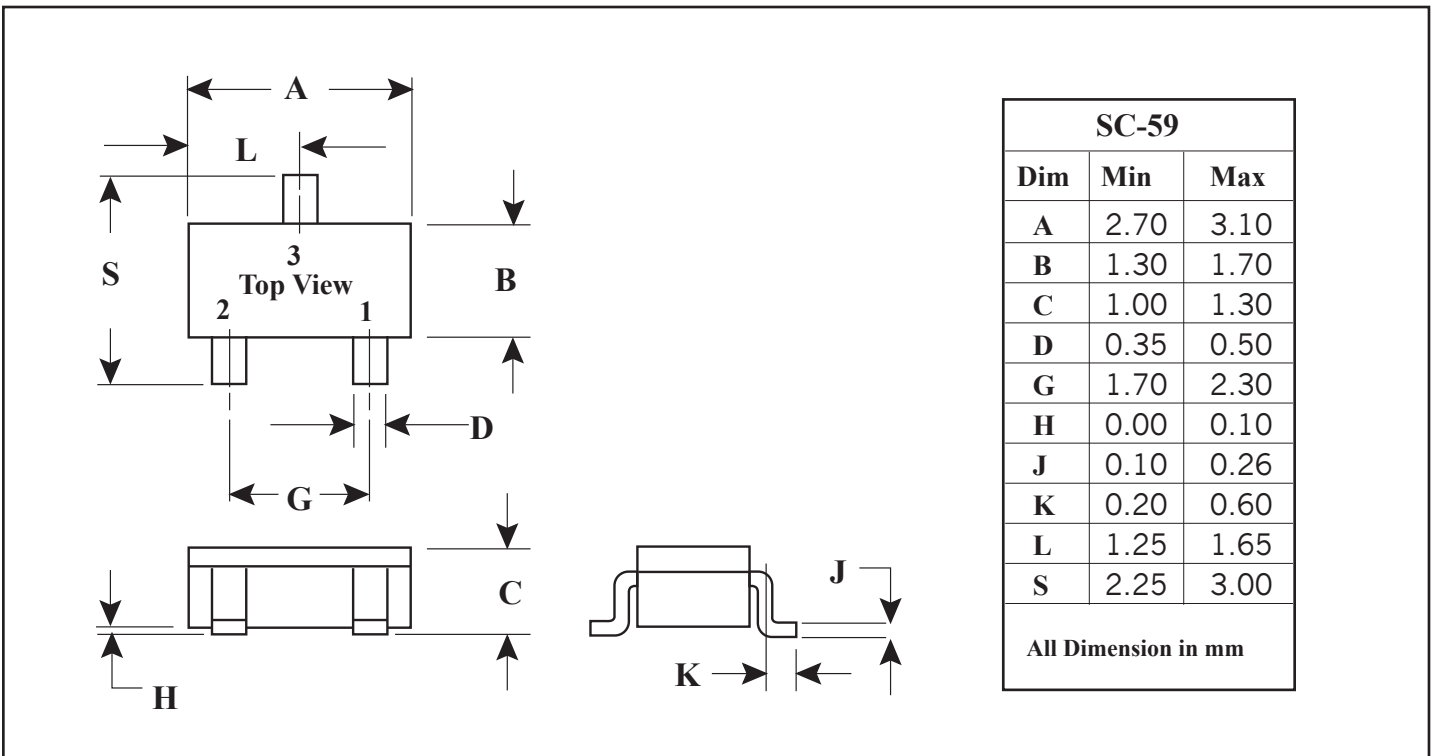

Maximum Ratings and Electrical Characteristics

Rating 25°C Ambient Temperature Unless Otherwise Specified.

Single Phase Half Wave, 60Hz , Resistive or Inductive Load.

For Capacitive Load, Derate Current by 20%.

Type Number	WSD411	WSD400	Unit
Maximum Recurrent Peak Reverse Voltage	20	40	V
Maximum RMS Voltage	14	28	V
Maximum DC Blocking Voltage	20	40	V
Maximum Average Forward Rectified Current	0.5		A
Peak Forward Surge Current, 8.3 ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	3.00		A
Maximum Instantaneous Forward Voltage at 0.5A	0.45	0.53	V
Maximum DC Reverse Current Ta=25°C	0.1		mA
At Rated DC Blocking Voltage Ta=100°C	4.0		mA
Operating Temperature Range Tj	-25.....+ 125		°C
Storage Temperature Range TSTG	-50.....+ 125		°C

Device Marking



Item	Marking	Equivalent Circuitdiagram
WSD411	05T	
WSD400	05F	

FIG.1-TYPICAL FORWARD CHARACTERISTICS

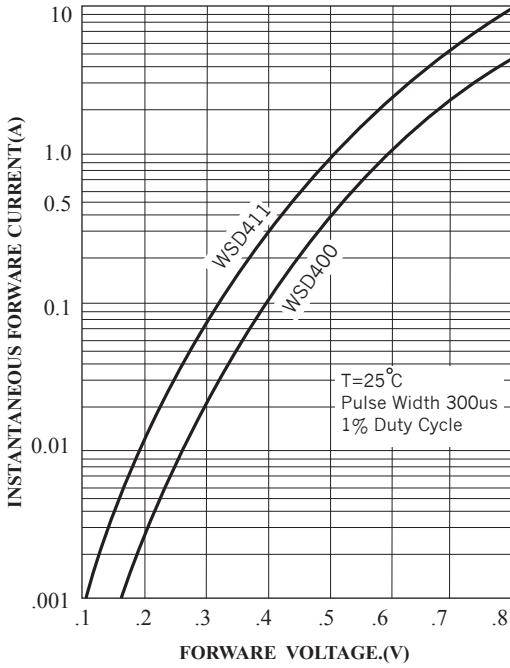


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

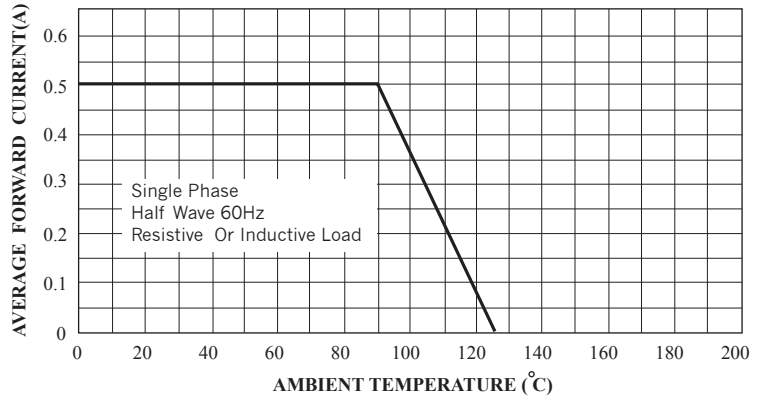


FIG.3-TYPICAL REVERSE CHARACTERISTICS

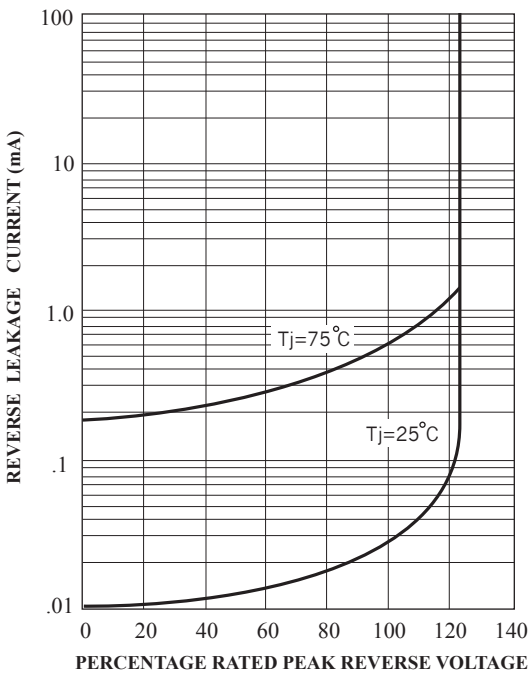


FIG.4-TYPICAL JUNCTION CAPACITANCE

