


2,500 V - 10,000 V Rectifiers

0.40 A - 1.0 A Forward Current

100 ns Recovery Time

Z25UF
Z50UF
Z100UF

AXIAL LEADED
EPOXY MOLDED




5

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage (V _{rw})	Average Rectified Current (I _o)		Reverse Current @ V _{rw} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current t _p =8.3ms (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (3) (T _{rr})	Thermal Impedance θ _{J-L}		Junction Cap. @50VDC @ 1kHz (C _j)
		55°C(1)	100°C(2)	25°C	100°C	25°C	25°C				L=.000	L=.250	
	Volts	Amps	Amps	µA	µA	Volts	Amps	Amps	Amps	ns	°C/W	°C/W	pF
Z25UF	2500	1.00	0.50	1.0	25	7.5	2.0	60	10	100	3	10.0	20
Z50UF	5000	0.75	0.38	1.0	25	10.5	1.0	40	8	100	3	10.0	16
Z100UF	10000	0.40	0.20	1.0	25	14.0	0.6	25	5	100	3	10.0	8

(1)TL=55°C L=0.375" (2)TL=100°C L=0.375" (3)I_f=0.5A, I_r=1.0A, I_{rr}=0.25A *Op. Temp.= -55°C to +150°C Stg. Temp.= -55°C to +175°C

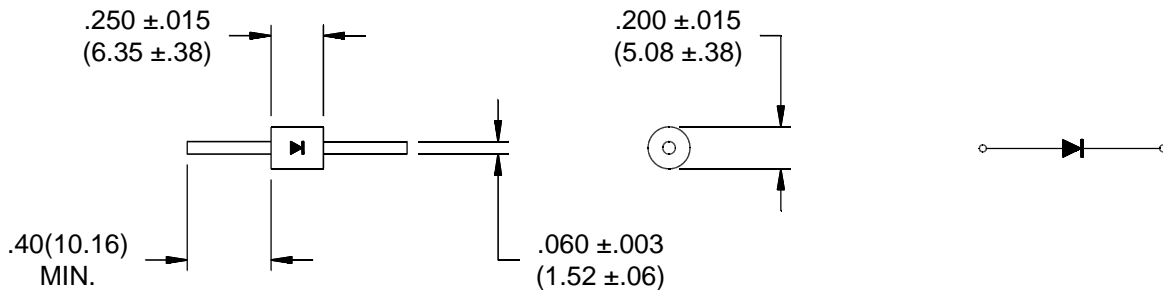

Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
8711 W. Roosevelt Ave.
Visalia, CA 93291

TEL 559-651-1402
FAX 559-651-0740
www.voltagemultipliers.com

Z25UF Z50UF Z100UF

