

KR Electronics 2600 Bandpass Filter

General Description


KR 2600 is a 120 MHz bandpass filters. Other passband frequencies are available. Please consult the factory.

Features


- 120 MHz Bandpass
- 50 Ω Source and Load
- SMA Connectors

Typical Performance

Passband Amplitude & Return Loss
(1 dB/div & 5 dB/div)

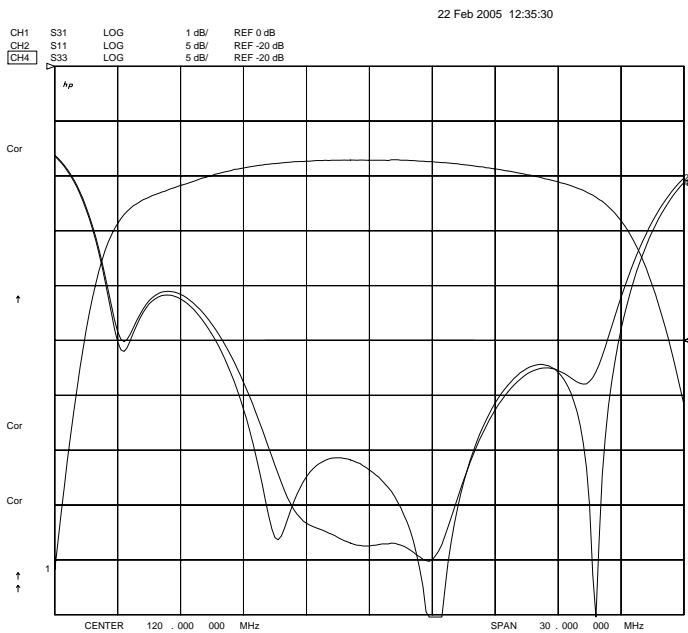

Overall Response
(10 dB/div)

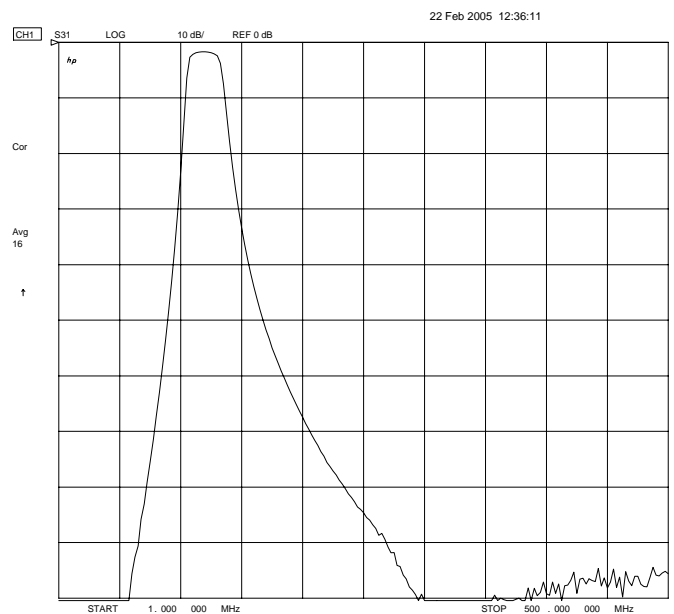

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2600 Bandpass

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	120 MHz
Insertion Loss	< 3 dB (< 2 dB Typical)
Minimum 1 dB Bandwidth	10 MHz
Source & Load	50 Ω

Physical Dimensions

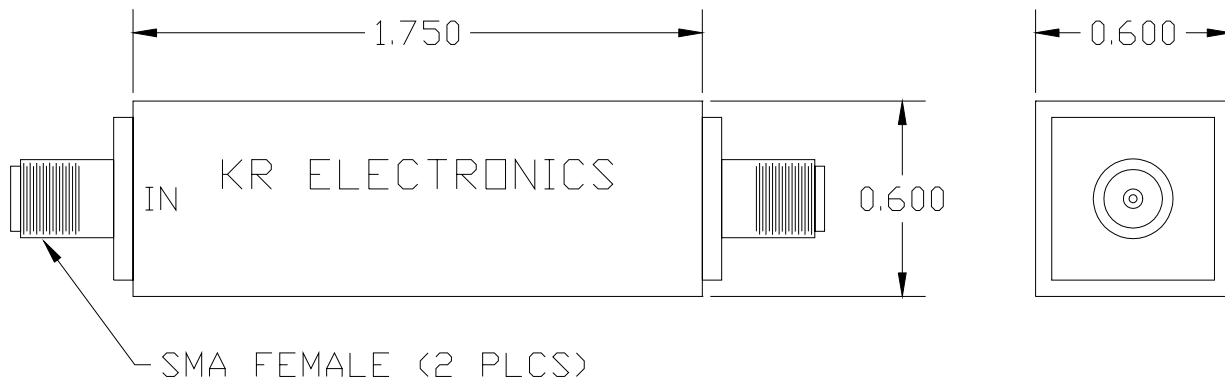

Dimensions shown in inches