

**2N1131**  
**SILICON**  
**PNP TRANSISTOR**



**TO-39 CASE**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 2N1131 is a silicon PNP transistor mounted in a hermetically sealed package designed for medium current switching applications.

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

	SYMBOL		UNITS
Collector-Base Voltage	$V_{CB0}$	50	V
Collector-Emitter Voltage ( $R_{BE}=10\Omega$ )	$V_{CER}$	50	V
Collector-Emitter Voltage	$V_{CEO}$	35	V
Emitter-Base Voltage	$V_{EBO}$	5.0	V
Continuous Collector Current	$I_C$	0.6	A
Power Dissipation ( $T_C=25^\circ\text{C}$ )	$P_D$	2.0	W
Power Dissipation	$P_D$	0.6	W
Operating and Storage Junction Temperature	$T_J, T_{stg}$	-65 to +200	$^\circ\text{C}$


**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$I_{CBO}$	$V_{CB}=30\text{V}$		1.0	$\mu\text{A}$
$I_{CBO}$	$V_{CB}=30\text{V}, T_A=150^\circ\text{C}$		100	$\mu\text{A}$
$I_{CBO}$	$V_{CB}=50\text{V}$		100	$\mu\text{A}$
$I_{EBO}$	$V_{EB}=2.0\text{V}$		100	$\mu\text{A}$
$BV_{CBO}$	$I_C=100\mu\text{A}$	50		V
$BV_{CER}$	$I_C=100\text{mA}, R_{BE}=10\Omega$	50		V
$BV_{CEO}$	$I_C=100\text{mA}$	35		V
$BV_{EBO}$	$I_E=100\mu\text{A}$	5.0		V
$V_{CE(SAT)}$	$I_C=150\text{mA}, I_B=15\text{mA}$		1.5	V
$V_{BE(SAT)}$	$I_C=150\text{mA}, I_B=15\text{mA}$		1.3	V
$h_{FE}$	$V_{CE}=10\text{V}, I_C=5.0\text{mA}$	15		
$h_{FE}$	$V_{CE}=10\text{V}, I_C=150\text{mA}$	20	45	
$f_T$	$V_{CE}=10\text{V}, I_C=50\text{mA}, f=20\text{MHz}$	50		MHz
$C_{ob}$	$V_{CB}=10\text{V}, I_E=0, f=100\text{kHz}$		45	pF
$C_{ib}$	$V_{EB}=0.5\text{V}, I_C=0, f=100\text{kHz}$		80	pF

2N1131  
SILICON  
PNP TRANSISTOR



TO-39 CASE - MECHANICAL OUTLINE

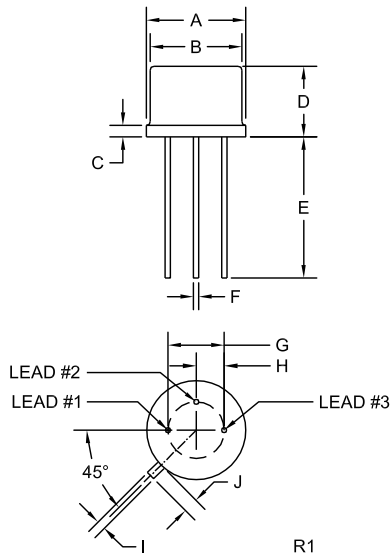

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.335	0.370	8.51	9.40
B (DIA)	0.315	0.335	8.00	8.51
C	-	0.040	-	1.02
D	0.240	0.260	6.10	6.60
E	0.500	-	12.70	-
F (DIA)	0.016	0.021	0.41	0.53
G (DIA)	0.200		5.08	
H	0.100		2.54	
I	0.028	0.034	0.71	0.86
J	0.029	0.045	0.74	1.14

TO-39 (REV: R1)

LEAD CODE:

- 1) Emitter
- 2) Base
- 3) Collector

MARKING: FULL PART NUMBER

R0 (3-April 2013)