




# NAiS

**High capacity PhotoMOS Relay. (Load current Max. 4A)  
DC load type is available.**

**Power PhotoMOS  
(AQZ10○, 20○)**

## FEATURES

1. High capacity PhotoMOS Relay in a compact and slim 4-pin SIL
2. Extremely low ON resistance
3. Control low-level signal  
Power Photo MOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
4. Low-level off state leakage current
5. High I/O isolation voltage 2,500 V
6. Eliminates the need for a counter electromotive protection diode in the drive circuit on the input side
7. Eliminate the need for a power supply to drive the power MOSFET
8. PC board layout is simplified
9. No restriction on mounting direction
10. Varistor incorporated type is also available.

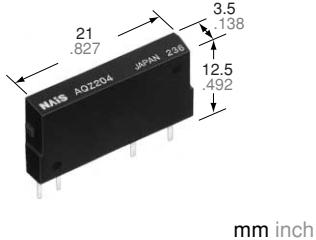

## TYPICAL APPLICATIONS

- High-speed inspection machines
- IC checker
- NC machine, Robots
- Office machines
- Telecommunication
- Automotive
- Industrial control

## TYPES

### 1. AC/DC type

| Output rating |              | Part No. | Packing quantity |              |
|---------------|--------------|----------|------------------|--------------|
| Load voltage  | Load current |          | Inner carton     | Outer carton |
| 60 V          | 3.0 A        | AQZ202   | 25 pcs.          | 500 pcs.     |
| 100 V         | 2.0 A        |          |                  |              |
| 200 V         | 1.0 A        |          |                  |              |
| 400 V         | 0.5 A        |          |                  |              |

### 2. DC type

| Output rating |              | Part No. | Packing quantity |              |
|---------------|--------------|----------|------------------|--------------|
| Load voltage  | Load current |          | Inner carton     | Outer carton |
| 60 V          | 4.0 A        | AQZ102   | 25 pcs.          | 500 pcs.     |
| 100 V         | 2.6 A        |          |                  |              |
| 200 V         | 1.3 A        |          |                  |              |
| 400 V         | 0.7 A        |          |                  |              |

Notes: Load voltage and current of AC/DC type: Peak AC/DC.

Load voltage and current of DC type: DC

**RATING****1. AC/DC type**

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| Item                    |                         | Symbol            | AQZ202                          | AQZ205 | AQZ207                             | AQZ204 | Remarks                              |
|-------------------------|-------------------------|-------------------|---------------------------------|--------|------------------------------------|--------|--------------------------------------|
| Input                   | LED forward current     | I <sub>F</sub>    | 50 mA                           |        |                                    |        |                                      |
|                         | LED reverse voltage     | V <sub>R</sub>    | 5 V                             |        |                                    |        |                                      |
|                         | Peak forward current    | I <sub>FP</sub>   | 1 A                             |        |                                    |        | f = 100 Hz, Duty factor = 0.1%       |
|                         | Power dissipation       | P <sub>in</sub>   | 75 mW                           |        |                                    |        |                                      |
| Output                  | Load voltage (Peak AC)  | V <sub>L</sub>    | 60 V                            | 100 V  | 200 V                              | 400 V  |                                      |
|                         | Continuous load current | I <sub>L</sub>    | 3.0 A                           | 2.0 A  | 1.0 A                              | 0.5 A  |                                      |
|                         | Peak load current       | I <sub>peak</sub> | 9.0 A                           | 6.0 A  | 3.0 A                              | 1.5 A  | 100 ms (1 shot), V <sub>L</sub> = DC |
|                         | Power dissipation       | P <sub>out</sub>  | 1.6 W                           |        |                                    |        |                                      |
| Total power dissipation |                         | P <sub>T</sub>    | 1.6 W                           |        |                                    |        |                                      |
| I/O isolation voltage   |                         | V <sub>iso</sub>  | 2,500 V AC                      |        |                                    |        |                                      |
| Temperature limits      | Operating               | T <sub>opr</sub>  | -40°C to +85°C -40°F to +185°F  |        | Non-condensing at low temperatures |        |                                      |
|                         | Storage                 | T <sub>stg</sub>  | -40°C to +100°C -40°F to +212°F |        |                                    |        |                                      |


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item                     |                                  | Symbol            | AQZ202                                    | AQZ205                                  | AQZ207  | AQZ204  | Condition  |
|--------------------------|----------------------------------|-------------------|---|---|---------|---|--|
| Input                    | LED operate current              | I <sub>Fon</sub>  | 1.0 mA                                    |   |         |   | I <sub>L</sub> = 100 mA<br>V <sub>L</sub> = 10 V                                   |
|                          |                                  |                   | 3.0 mA                                    |   |         |   |  |
|                          | LED turn off current             | I <sub>Foff</sub> | 0.4 mA                                    |   |         |   | I <sub>L</sub> = 100 mA<br>V <sub>L</sub> = 10 V                                   |
|                          |                                  |                   | 0.9 mA                                    |   |         |   |  |
| Output                   | LED dropout voltage              | V <sub>F</sub>    | 1.25 V (1.16 V at I <sub>F</sub> = 10 mA) |   |         |   | I <sub>F</sub> = 50 mA   |
|                          |                                  |                   | 1.5 V                                     |   |         |   |  |
|                          | On resistance                    | R <sub>on</sub>   | 0.11 Ω                                    | 0.23 Ω                                  | 0.7 Ω   | 2.1 Ω   | I <sub>F</sub> = 10 mA<br>I <sub>L</sub> = Max.<br>Within 1 s on time              |
|                          |                                  |                   | 0.18 Ω                                    | 0.34 Ω                                  | 1.1 Ω   | 3.2 Ω   |  |
| Transfer characteristics | Off state leakage current        | Maximum           | —   | 10 μA                                   |         | I <sub>F</sub> = 0 mA<br>V <sub>L</sub> = Max.  |  |
|                          | Switching speed                  | T <sub>on</sub>   | 2.46 ms                                   | 2.40 ms                                 | 1.12 ms | 1.65 ms   | I <sub>F</sub> = 10 mA<br>I <sub>L</sub> = 100 mA<br>V <sub>L</sub> = 10 V         |
|                          |                                  |                   | 5.0 ms                                    |   |         |   |  |
|                          |                                  |                   | 5.64 ms                                   | 5.65 ms                                 | 2.57 ms | 3.88 ms   | I <sub>F</sub> = 5 mA<br>I <sub>L</sub> = 100 mA<br>V <sub>L</sub> = 10 V          |
|                          |                                  | T <sub>off</sub>  | 10.0 ms                                   |   |         |   |  |
|                          |                                  |                   | 0.22 ms                                   | 0.21 ms                                 | 0.10 ms | 0.08 ms   | I <sub>F</sub> = 5 mA or 10 mA<br>I <sub>L</sub> = 100 mA<br>V <sub>L</sub> = 10 V |
|                          | I/O capacitance                  | C <sub>iso</sub>  | 0.8 pF                                    |   |         |   | f = 1 MHz<br>V <sub>B</sub> = 0 V  |
|                          |                                  |                   | 1.5 pF                                    |   |         |   |  |
|                          | Initial I/O isolation resistance | Minimum           | R <sub>iso</sub>                          | 1,000 MΩ                                |         | 500 V DC  |  |
|                          | Maximum operating speed          | Maximum           | —   | 0.5 cps                                 |         | I <sub>F</sub> = 10 mA<br>Duty factor = 50%<br>I <sub>L</sub> = Max., V <sub>L</sub> = Max. |  |
| Vibration resistance     |                                  | Minimum           | —   | 10 to 55 Hz at double amplitude of 3 mm |         | 2 hours for 3 axes  |  |
| Shock resistance         |                                  | Minimum           | —   | 4,900 m/s <sup>2</sup> {500 G}1 ms      |         | 3 times for 3 axes  |  |

Note: Recommendable LED forward current I<sub>F</sub> = 5 to 10 mA.

For type of connection, see page 37.

\*Turn on/off time

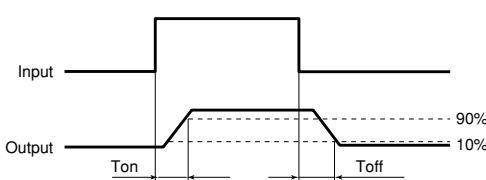

# Power PhotoMOS (AQZ10○, 20○)

## 2. DC type

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| Item                    |                              | Symbol     | AQZ102                          | AQZ105 | AQZ107 | AQZ104 | Remarks                                   |
|-------------------------|------------------------------|------------|---------------------------------|--------|--------|--------|---|
| Input                   | LED forward current          | $I_F$      | 50 mA                           |        |        |        |   |
|                         | LED reverse voltage          | $V_R$      | 5 V                             |        |        |        |   |
|                         | Peak forward current         | $I_{FP}$   | 1 A                             |        |        |        | $f = 100 \text{ Hz}$ , Duty factor = 0.1% |
|                         | Power dissipation            | $P_{in}$   | 75 mW                           |        |        |        |   |
| Output                  | Load voltage (DC)            | $V_L$      | 60 V                            | 100 V  | 200 V  | 400 V  |   |
|                         | Continuous load current (DC) | $I_L$      | 4.0 A                           | 2.6 A  | 1.3 A  | 0.7 A  |   |
|                         | Peak load current            | $I_{peak}$ | 9.0 A                           | 6.0 A  | 3.0 A  | 1.5 A  | 100 ms (1 shot), $V_L = \text{DC}$        |
|                         | Power dissipation            | $P_{out}$  | 1.35 W                          |        |        |        |   |
| Total power dissipation |                              | $P_T$      | 1.35 W                          |        |        |        |   |
| I/O isolation voltage   |                              | $V_{iso}$  | 2,500 V AC                      |        |        |        |   |
| Temperature limits      | Operating                    | $T_{opr}$  | -40°C to +85°C -40°F to +185°F  |        |        |        | Non-condensing at low temperatures        |
|                         | Storage                      | $T_{stg}$  | -40°C to +100°C -40°F to +212°F |        |        |        |   |


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item                     |                                  | Symbol        | AQZ102                                    | AQZ105                                  | AQZ107  | AQZ104             | Condition  |  |
|--------------------------|----------------------------------|---------------|---|---|---------|--------------------|--|--|
| Input                    | LED operate current              | $I_{Fon}$     | 1.0 mA                                    |   |         |                    | $I_L = 100 \text{ mA}$<br>$V_L = 10 \text{ V}$                     |  |
|                          |                                  |               | 3.0 mA                                    |   |         |                    |  |  |
|                          | LED turn off current             | $I_{Foff}$    | 0.4 mA                                    |   |         |                    | $I_L = 100 \text{ mA}$<br>$V_L = 10 \text{ V}$                     |  |
|                          |                                  |               | 0.9 mA                                    |   |         |                    |  |  |
| Output                   | LED dropout voltage              | $V_F$         | 1.25 V (1.16 V at $I_F = 10 \text{ mA}$ ) |   |         |                    | $I_F = 50 \text{ mA}$  |  |
|                          |                                  |               | 1.5 V                                     |   |         |                    |  |  |
|                          | On resistance                    | $R_{on}$      | 0.05 Ω                                    | 0.081 Ω                                 | 0.34 Ω  | 1.06 Ω             | $I_F = 10 \text{ mA}$<br>$I_L = \text{Max.}$<br>Within 1 s on time |  |
|                          |                                  |               | 0.09 Ω                                    | 0.17 Ω                                  | 0.55 Ω  | 1.6 Ω              |  |  |
| Transfer characteristics | Off state leakage current        | Maximum       | —   |   | 10 μA   |                    | $I_F = 0 \text{ mA}$<br>$V_L = \text{Max.}$                        |  |
|                          | Switching speed                  | Turn on time* | $T_{on}$                                  | 1.66 ms                                 | 1.89 ms | 0.83 ms            | 1.01 ms  | $I_F = 10 \text{ mA}$<br>$I_L = 100 \text{ mA}$<br>$V_L = 10 \text{ V}$                  |
|                          |                                  |               |   | 5.0 ms                                  |         |                    |  |  |
|                          |                                  |               | $T_{off}$                                 | 3.79 ms                                 | 4.50 ms | 1.75 ms            | 2.34 ms  | $I_F = 5 \text{ mA}$<br>$I_L = 100 \text{ mA}$<br>$V_L = 10 \text{ V}$                   |
|                          |                                  |               |   | 10.0 ms                                 |         |                    |  |  |
|                          | Turn off time*                   | Typical       | $C_{iso}$                                 | 0.15 ms                                 | 0.19 ms | 0.08 ms            | 0.08 ms  | $I_F = 5 \text{ mA or } 10 \text{ mA}$<br>$I_L = 100 \text{ mA}$<br>$V_L = 10 \text{ V}$ |
|                          |                                  |               |   | 3.0 ms                                  |         |                    |  |  |
|                          | I/O capacitance                  | Typical       | $R_{iso}$                                 | 0.8 pF                                  |         |                    |  | $f = 1 \text{ MHz}$<br>$V_B = 0 \text{ V}$   |
|                          | Initial I/O isolation resistance | Minimum       |   | 1.5 pF                                  |         |                    |  |  |
|                          | Maximum operating speed          | Maximum       | —   | 1,000 MΩ                                |         | 500 V DC           |  |  |
| Vibration resistance     |                                  | Minimum       | —   | 10 to 55 Hz at double amplitude of 3 mm |         | 2 hours for 3 axes |  |  |
| Shock resistance         |                                  | Minimum       | —   | 4,900 m/s² {500 G} 1 ms                 |         | 3 times for 3 axes |  |  |

Note: Recommendable LED forward current  $I_F = 5$  to 10 mA.

For type of connection, see page 37.

\*Turn on/off time

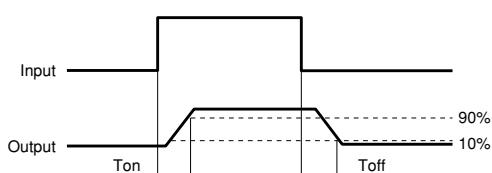


- For Dimensions, see Page 31.
- For Schematic and Wiring Diagrams, see Page 37.
- For Cautions for Use, see Page 42.

## REFERENCE DATA


### 1.-(1) Load current vs. ambient temperature characteristics (AC/DC type)

Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

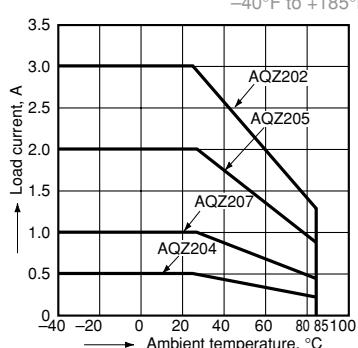


### 1.-(2) Load current vs. ambient temperature characteristics (DC type)

Allowable ambient temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 $-40^{\circ}\text{F}$  to  $+185^{\circ}\text{F}$

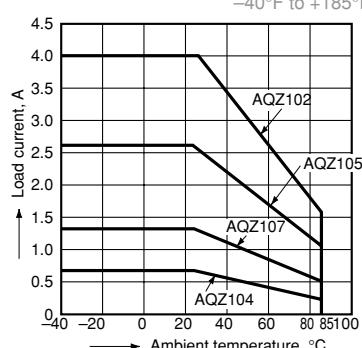


### 2. Load current vs. ambient temperature characteristics in adjacent mounting

$I_L$ : Load current;  
 $I_L(\text{max.})$ : Maximum continuous load current

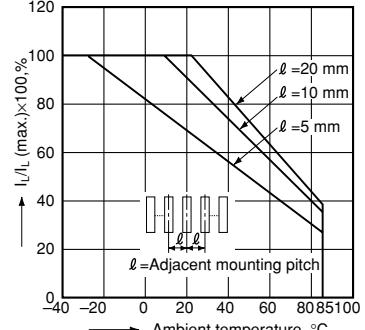


### 3.-(1) On resistance vs. ambient temperature characteristics

LED current: 10 mA;  
Continuous load current: 1.2 A (DC) (AQZ202),  
0.8 A (DC) (AQZ205),  
1.6 A (DC) (AQZ102),  
1.04 A (DC) (AQZ105)

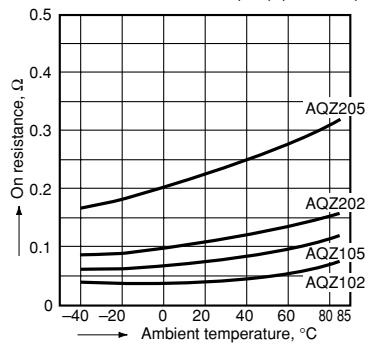


### 3.-(2) On resistance vs. ambient temperature characteristics

LED current: 10 mA;  
Continuous load current: 0.4 A (DC) (AQZ207),  
0.2 A (DC) (AQZ204),  
0.52 A (DC) (AQZ107),  
0.28 A (DC) (AQZ104)

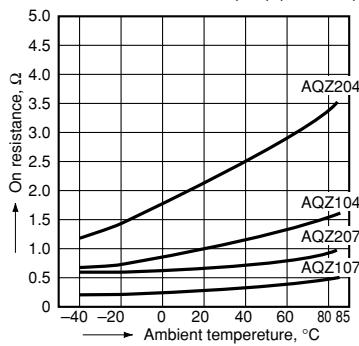


### 4.-(1) Turn on time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

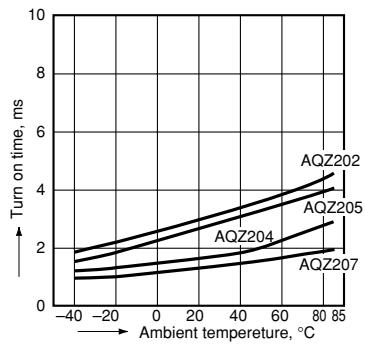


### 5.-(1) Turn off time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

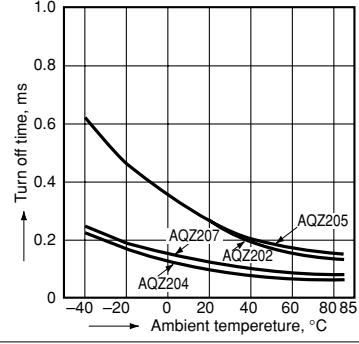


### 5.-(2) Turn off time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;  
Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

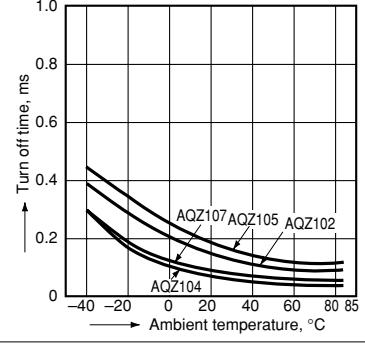


### 6.-(1) LED operate vs. ambient temperature characteristics (AC/DC type)

Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

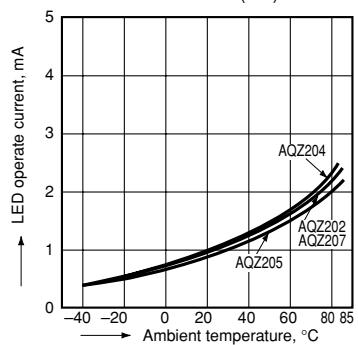


### 6.-(2) LED operate vs. ambient temperature characteristics (DC type)

Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

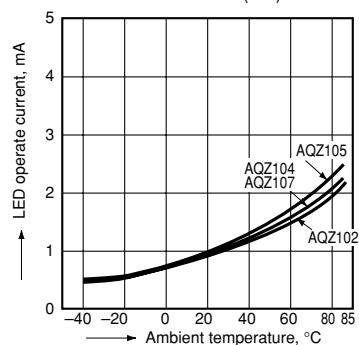

### 7.-(1) LED turn off current vs. ambient temperature characteristics (AC/DC type)

Load voltage: 10 V (DC);  
Continuous load current: 100 mA (DC)

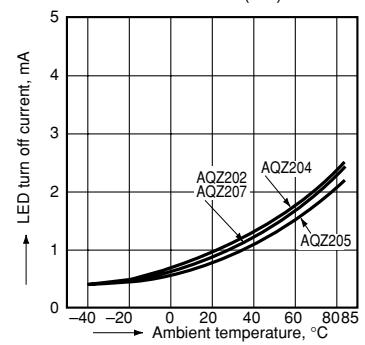


# Power PhotoMOS (AQZ10○, 20○)

7.-(2) LED turn off current vs. ambient temperature characteristics (DC type)


Load voltage: 10 V (DC);

Continuous load current: 100 mA (DC)

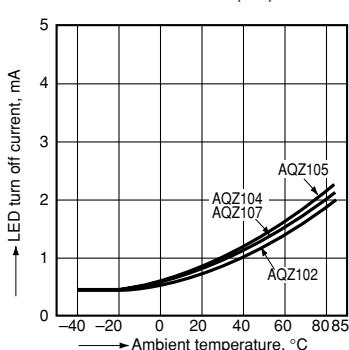


8. LED dropout voltage vs. ambient temperature characteristics

Sample: all types; LED current: 5 to 50 mA

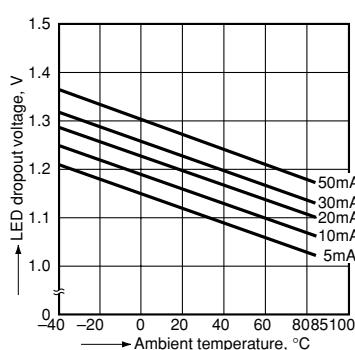


9.-(1) Current vs. voltage characteristics of output at MOS portion (AC/DC type)

Ambient temperature: 25°C 77°F

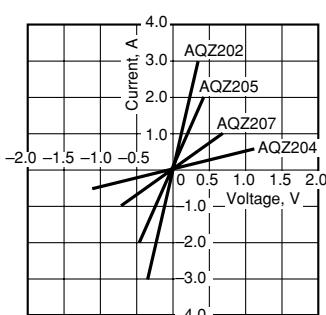


9.-(2) Current vs. voltage characteristics of output at MOS portion (DC type)

Ambient temperature: 25°C 77°F

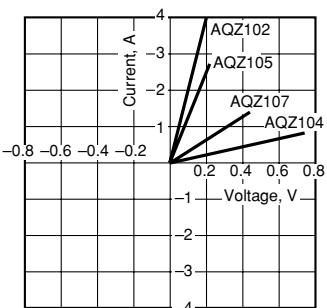

10. Off state leakage current vs. load voltage characteristics

Ambient temperature: 25°C 77°F

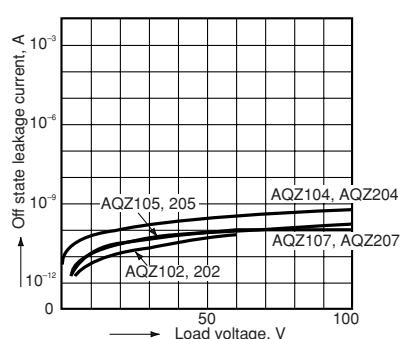


11.-(1) Turn on time vs. LED forward current characteristics (AC/DC type)

Load voltage: 10 V (DC);

Continuous load current: 100 mA (DC);

Ambient temperature: 25°C 77°F

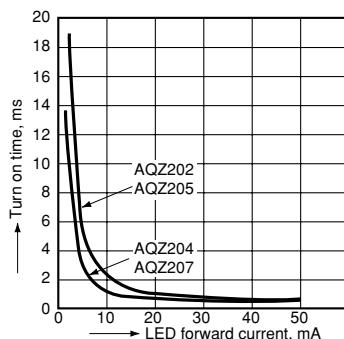


11.-(2) Turn on time vs. LED forward current characteristics (DC type)

Load voltage: 10 V (DC);

Continuous load current: 100 mA (DC);

Ambient temperature: 25°C 77°F

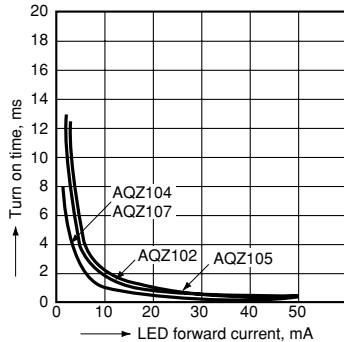


12.-(1) Turn off time vs. LED forward current characteristics (AC/DC type)

Load voltage: 10 V (DC);

Continuous load current: 100 mA (DC);

Ambient temperature: 25°C 77°F

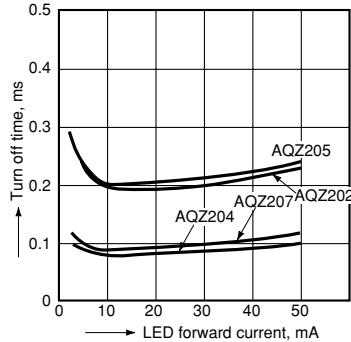


12.-(2) Turn off time vs. LED forward current characteristics (DC type)

Measured portion: between terminals 4 and 6;

Load voltage: 10 V (DC);

Continuous load current: 100 mA (DC);

Ambient temperature: 25°C 77°F

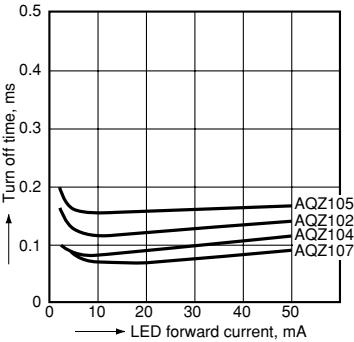


13.-(1) Turn on time vs. load voltage characteristics (Load voltage: 60, 100 V type)

LED current: 10 mA;

Continuous load current: 100 mA;

Ambient temperature: 25°C 77°F

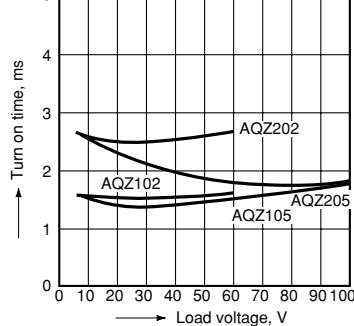


13.-(2) Turn on time vs. load voltage characteristics (Load voltage: 200, 400 V type)

LED current: 10 mA;

Continuous load current: 100 mA;

Ambient temperature: 25°C 77°F

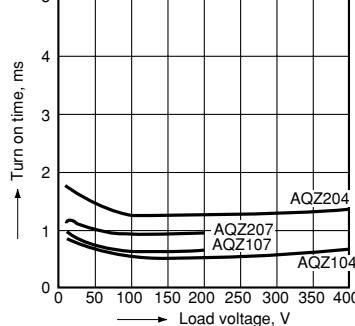


14.-(1) Turn on time vs. load current characteristics (Load voltage: 60, 100 V type)

LED current: 10 mA;


Load voltage: 10 V (DC);

Ambient temperature: 25°C 77°F

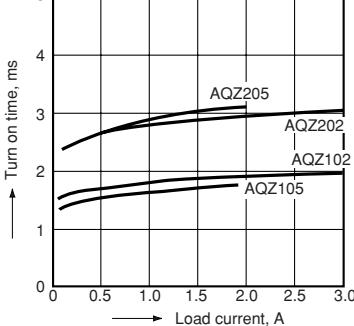


## Power PhotoMOS (AQZ10○, 20○)


14.-(2) Turn on time vs. load current characteristics (Load voltage: 200, 400 V type)  
LED current: 10 mA;  
Load voltage: 10 V (DC);  
Ambient temperature: 25°C 77°F

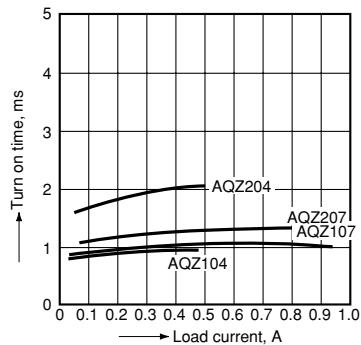


16.- (1) Turn off time vs. load current characteristics (Load voltage: 60, 100 V type)  
LED current: 10 mA;  
Load voltage: 10 V (DC);  
Ambient temperature: 25°C 77°F

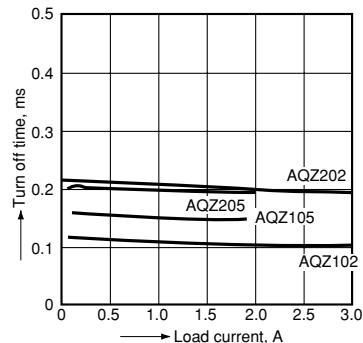


18.-1 Output capacitance vs. applied voltage characteristics (AC/DC type)  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

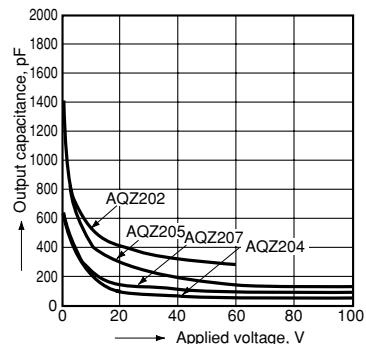


15.-1) Turn off time vs. load voltage  
characteristics (Load voltage: 60, 100 V type)  
LED current: 10 mA;  
Continuous load current: 100 mA;  
Ambient temperature: 25°C 77°F

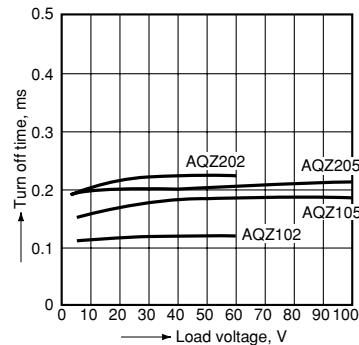


16.- (2) Turn off time vs. load current characteristics (Load voltage: 200, 400 V type)  
LED current: 10 mA;  
Load voltage: 10 V (DC);  
Ambient temperature: 25°C 77°F

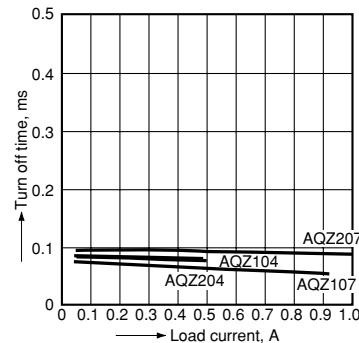


18.- (2) Output capacitance vs. applied voltage characteristics (DC type)  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

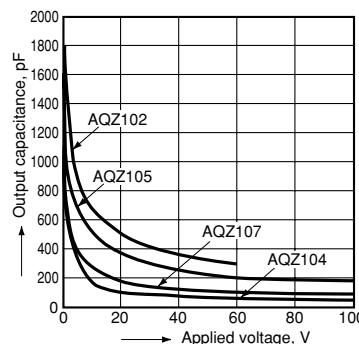

15.-(2) Turn off time vs. load voltage characteristics (Load voltage: 200, 400 V type)  
LED current: 10 mA;  
Continuous load current: 100 mA;  
Ambient temperature: 25°C 77°F

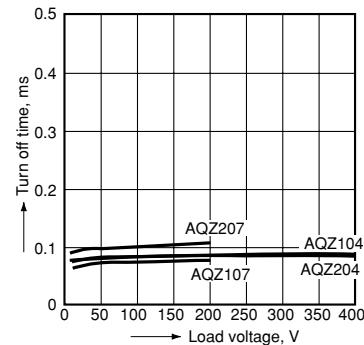


17. Maximum operating frequency vs. load voltage/current characteristics  
LED current: 10 mA;  
Ambient temperature: 25°C 77°F

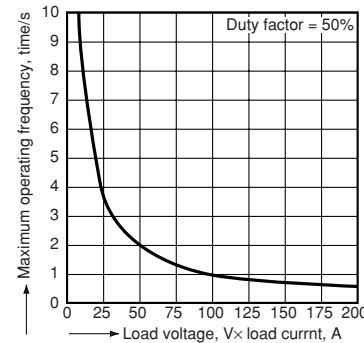


# ACCESSORY


## Socket

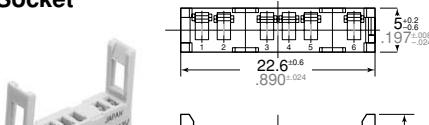

PA1a-PS

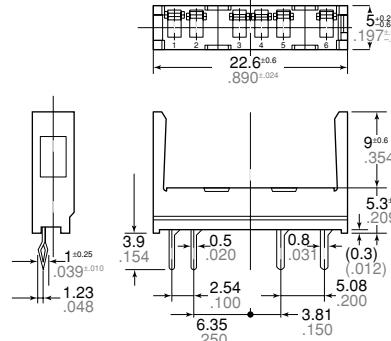

PA1a-PS-H

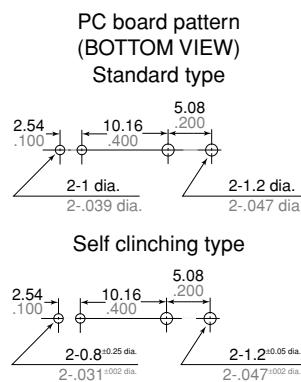

Tolerance: ±0.1 ± 0.04