

# **GP200MHS18**

## Half Bridge IGBT Module

DS5304-3.1 January 2001

### **FEATURES**

- Non Punch Through Silicon
- Isolated Copper Baseplate
- Low Inductance Internal Construction
- 200A Per Arm

### **APPLICATIONS**

- High Power Inverters
- Motor Controllers
- Induction Heating
- Resonant Converters

The Powerline range of high power modules includes half bridge, dual and single switch configurations covering voltages from 600V to 3300V and currents up to 4800A.

The GP200MHS18 is a half bridge 1800V, n channel enhancement mode, insulated gate bipolar transistor (IGBT) module. The IGBT has a wide reverse bias safe operating area (RBSOA) ensuring reliability in demanding applications.


The module incorporates an electrically isolated base plate and low inductance construction enabling circuit designers to optimise circuit layouts and utilise earthed heat sinks for safety.


### **ORDERING INFORMATION**

Order As:


#### **GP200MHS18**

Note: When ordering, please use the whole part number.



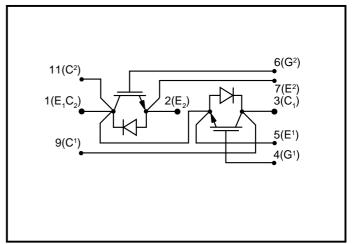



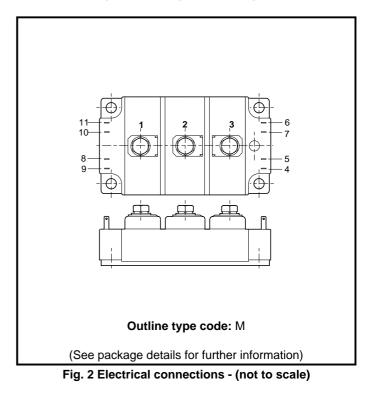

Caution: This device is sensitive to electrostatic discharge. Users should follow ESD handling procedures. **www.dynexsemi.com** 



### **ABSOLUTE MAXIMUM RATINGS - PER ARM**

Stresses above those listed under 'Absolute Maximum Ratings' may cause permanent damage to the device. In extreme conditions, as with all semiconductors, this may include potentially hazardous rupture of the package. Appropriate safety precautions should always be followed. Exposure to Absolute Maximum Ratings may affect device reliability.

#### T<sub>case</sub> = 25°C unless stated otherwise

Symbol	Parameter	Test Conditions	Max.	Units
V <sub>CES</sub>	Collector-emitter voltage	V <sub>GE</sub> = 0V	1800	V
V <sub>GES</sub>	Gate-emitter voltage	-	±20	V
۱ <sub>с</sub>	Collector current	DC, $T_{case} = 55^{\circ}C$ for $T_{j} = 125^{\circ}C$	200	А
I <sub>С(РК)</sub>	Peak collector current	1ms, T <sub>case</sub> = 110°C	400	А
P <sub>max</sub>	Max. transistor power dissipation	$T_{case} = 25^{\circ}C, T_{j} = 150^{\circ}C$	1500	w
V <sub>isol</sub>	Isolation voltage	Commoned terminals to base plate. AC RMS, 1 min, 50Hz	4000	V

### THERMAL AND MECHANICAL RATINGS

Symbol	Parameter	Test Conditions	Min.	Max.	Units
$R_{th(j-c)}$	Thermal resistance - transistor (per arm)	Continuous dissipation -	-	84	°C/kW
		junction to case			
$R_{th(j-c)}$	Thermal resistance - diode (per arm)	Continuous dissipation -	-	160	°C/kW
		junction to case			
R <sub>th(c-h)</sub>	Thermal resistance - case to heatsink (per module)	Mounting torque 5Nm	-	7	°C/kW
		(with mounting grease)			
T <sub>j</sub>	Junction temperature	Transistor	-	150	°C
		Diode	-	125	°C
T <sub>stg</sub>	Storage temperature range	-	-40	125	°C
-	Screw torque	Mounting - M6	-	5	Nm



### **ELECTRICAL CHARACTERISTICS**

### $T_{case} = 25^{\circ}C$ unless stated otherwise.

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Units
I <sub>CES</sub>	Collector cut-off current	$V_{GE} = 0V, V_{CE} = V_{CES}$	-	-	1	mA
		$V_{GE} = 0V, V_{CE} = V_{CES}, T_{case} = 125^{\circ}C$	-	-	7	mA
I <sub>GES</sub>	Gate leakage current	$V_{GE} = \pm 20V, V_{CE} = 0V$	-	-	1	μA
V <sub>GE(TH)</sub>	Gate threshold voltage	$I_c = 10 \text{mA}, V_{GE} = V_{CE}$	4.5	5.5	6.5	V
V <sub>CE(sat)</sub>	Collector-emitter saturation voltage	V <sub>GE</sub> = 15V, I <sub>C</sub> = 200A	-	3.5	4	V
		$V_{GE} = 15V, I_{C} = 200A, T_{Case} = 125^{\circ}C$	-	4.3	5	V
I <sub>F</sub>	Diode forward current	DC	-	-	200	A
I <sub>FM</sub>	Diode maximum forward current	t <sub>p</sub> = 1ms	-	-	400	A
V <sub>F</sub>	Diode forward voltage	I <sub>F</sub> = 200A	-	2.2	2.5	V
		I <sub>F</sub> = 200A, T <sub>case</sub> = 125°C	-	2.3	2.6	V
C <sub>ies</sub>	Input capacitance	V <sub>CE</sub> = 25V, V <sub>GE</sub> = 0V, f = 1MHz	-	25	-	nF
L <sub>M</sub>	Module inductance	-	-	30	-	nH



### **ELECTRICAL CHARACTERISTICS**

T<sub>case</sub> = 25°C unless stated otherwise


Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Units
t <sub>d(off)</sub>	Turn-off delay time	I <sub>C</sub> = 200A	-	500	650	ns
t <sub>r</sub>	Fall time	$V_{ge} = \pm 15V$	-	200	300	ns
E <sub>OFF</sub>	Turn-off energy loss	V <sub>CE</sub> = 900V	-	50	120	mJ
t <sub>d(on)</sub>	Turn-on delay time	$R_{G(ON)} = R_{G(OFF)} = 4.7\Omega$	-	450	600	ns
t <sub>r</sub>	Rise time	L ~ 100nH	-	90	120	ns
E <sub>on</sub>	Turn-on energy loss		-	60	80	mJ
Q <sub>rr</sub>	Diode reverse recovery charge	$I_{_{\rm F}}$ = 200A, $V_{_{\rm R}}$ = 50% $V_{_{\rm CES}}$ ,	-	50	80	μC
		$dI_F/dt = 2400A/\mu s$				

### T<sub>case</sub> = 125°C unless stated otherwise

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Units
t <sub>d(off)</sub>	Turn-off delay time	I <sub>c</sub> = 200A	-	600	800	ns
t <sub>r</sub>	Fall time	$V_{ge} = \pm 15V$	-	300	400	ns
E <sub>OFF</sub>	Turn-off energy loss	V <sub>CE</sub> = 900V	-	100	150	mJ
t <sub>d(on)</sub>	Turn-on delay time	$R_{G(ON)} = R_{G(OFF)} = 4.7\Omega$	-	540	700	ns
t <sub>r</sub>	Rise time	L ~ 100nH	-	100	130	ns
E <sub>on</sub>	Turn-on energy loss		-	100	120	mJ
Q <sub>rr</sub>	Diode reverse recovery charge	$I_{\rm F} = 200$ A, $V_{\rm R} = 50\%$ $V_{\rm CES}$ ,	-	80	110	μC
		$dI_F/dt = 2000A/\mu s$				




### **TYPICAL CHARACTERISTICS**

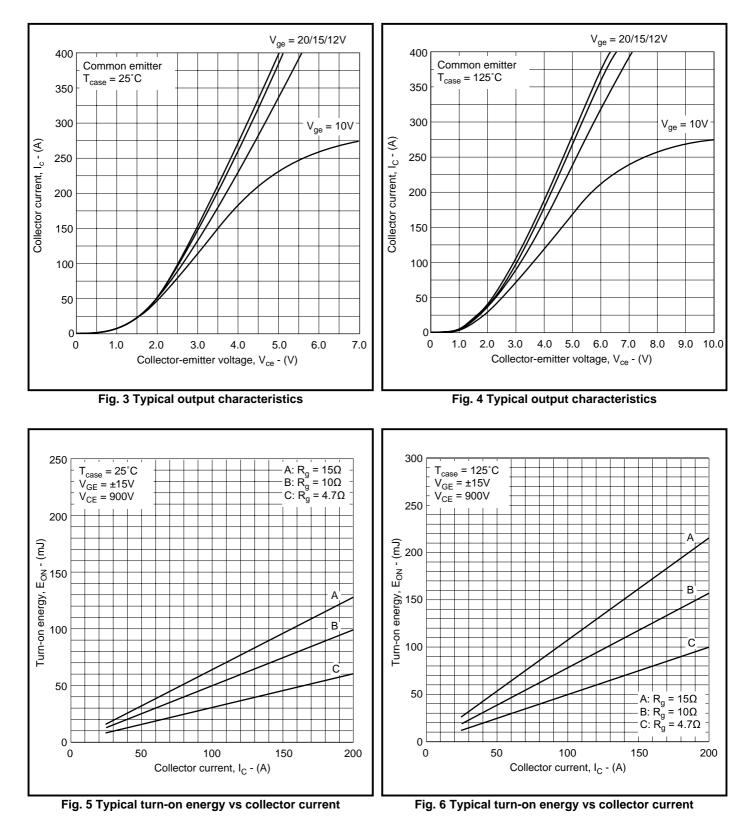


Caution: This device is sensitive to electrostatic discharge. Users should follow ESD handling procedures. **www.dynexsemi.com** 



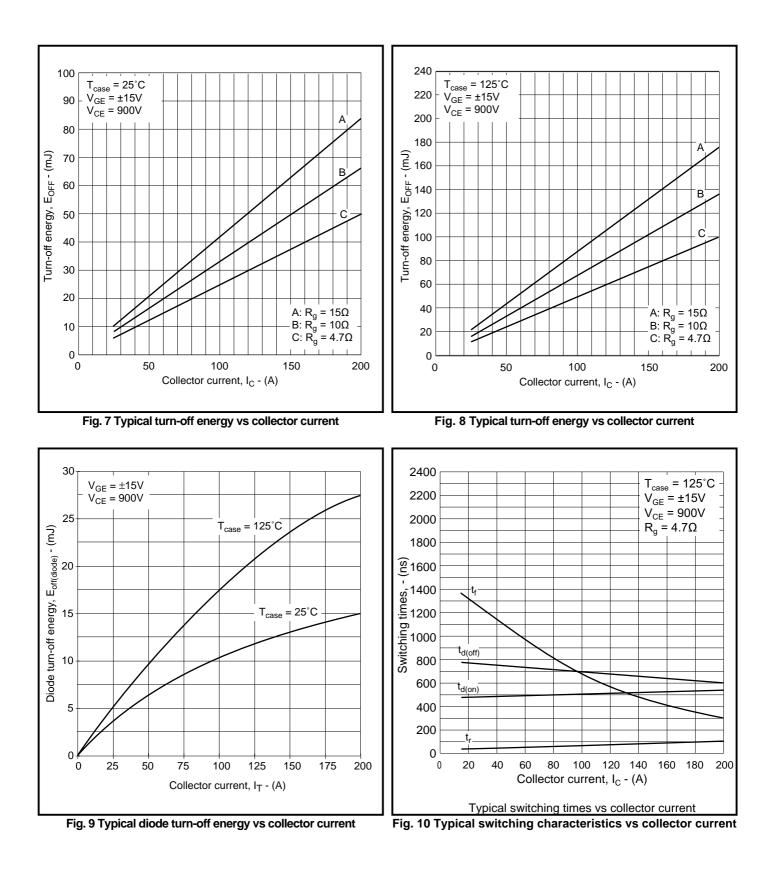



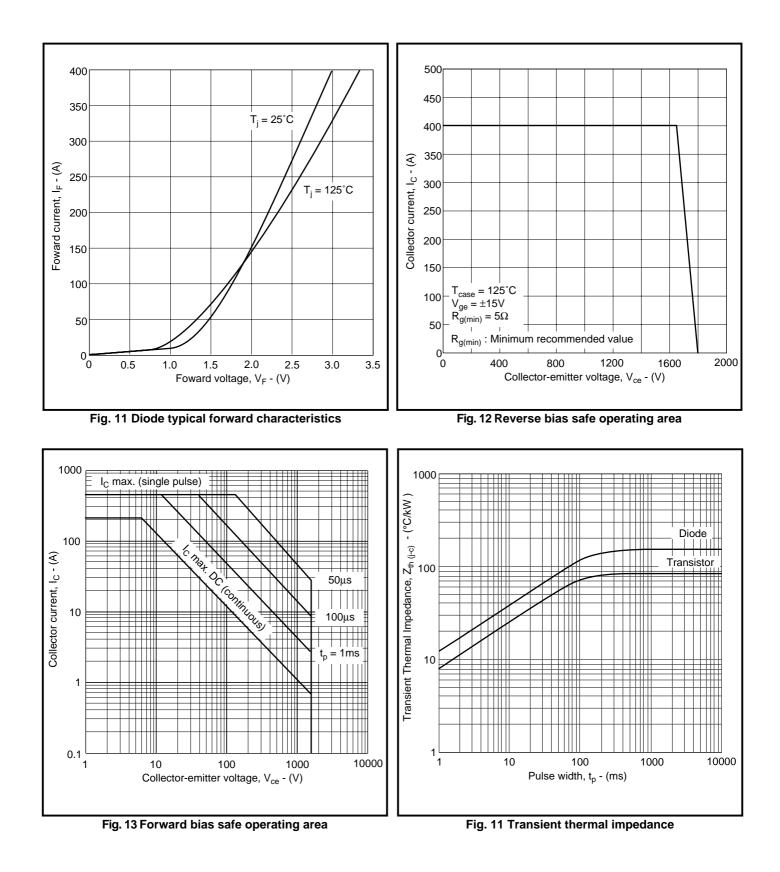

Caution: This device is sensitive to electrostatic discharge. Users should follow ESD handling procedures. **www.dynexsemi.com** 



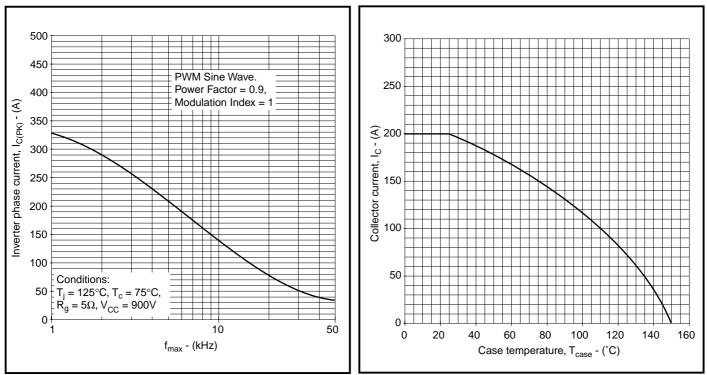



Fig. 12 3 Phase inverter operating frequency

Fig. 13 DC current rating vs case temperature



### PACKAGE DETAILS

For further package information, please visit our website or contact your nearest Customer Service Centre. All dimensions in mm, unless stated otherwise. DO NOT SCALE.

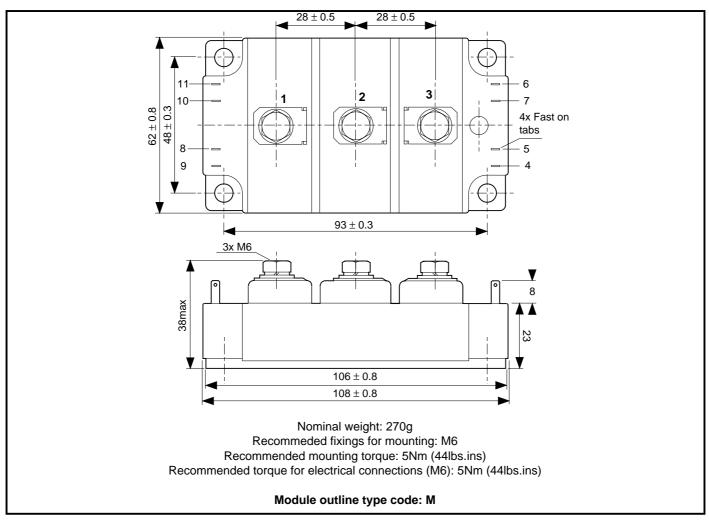

### **ASSOCIATED PUBLICATIONS**

Title	Application Note	
	Number	
Electrostatic handling precautions	AN4502	
An introduction to IGBTs	AN4503	
IGBT ratings and characteristics	AN4504	
Heatsink requirements for IGBT modules	AN4505	
Calculating the junction temperature of power semiconductors	AN4506	
Gate drive considerations to maximise IGBT efficiency	AN4507	
Parallel operation of IGBTs – punch through vs non-punch through characteristics	AN4508	
Guidance notes for formulating technical enquiries	AN4869	
Principle of rating parallel connected IGBT modules	AN5000	
Short circuit withstand capability in IGBTs	AN5167	
Driving Dynex Semincoductor IGBT modules with Concept gate drivers	AN5384	

Caution: This device is sensitive to electrostatic discharge. Users should follow ESD handling procedures. **www.dynexsemi.com** 



### POWER ASSEMBLY CAPABILITY

The Power Assembly group was set up to provide a support service for those customers requiring more than the basic semiconductor, and has developed a flexible range of heatsink and clamping systems in line with advances in device voltages and current capability of our semiconductors.

We offer an extensive range of air and liquid cooled assemblies covering the full range of circuit designs in general use today. The Assembly group continues to offer high quality engineering support dedicated to designing new units to satisfy the growing needs of our customers.

Using the latest CAD methods our team of design and applications engineers aim to provide the Power Assembly Complete Solution (PACs).

#### HEATSINKS

The Power Assembly group has its own proprietary range of extruded aluminium heatsinks. They have been designed to optimise the performance of Dynex semiconductors. Data with respect to air natural, forced air and liquid cooling (with flow rates) is available on request.

For further information on device clamps, heatsinks and assemblies, please contact your nearest sales representative or customer service office.



#### http://www.dynexsemi.com

e-mail: power\_solutions@dynexsemi.com

HEADQUARTERS OPERATIONS <b>DYNEX SEMICONDUCTOR LTD</b> Doddington Road, Lincoln. Lincolnshire. LN6 3LF. United Kingdom. Tel: 00-44-(0)1522-500500	CUSTOMER SERVICE CENTRES Central Europe Tel: +33 (0)1 58 04 91 00. Fax: +33 (0)1 46 38 51 33 North America Tel: 011-800-5554-5554. Fax: 011-800-5444-5444 UK, Scandinavia & Rest Of World Tel: +44 (0)1522 500500. Fax: +44 (0)1522 500020
Fax: 00-44-(0)1522-500550	SALES OFFICES
	Central Europe Tel: +33 (0)1 58 04 91 00. Fax: +33 (0)1 46 38 51 33
DYNEX POWER INC.	North America Tel: (613) 723-7035. Fax: (613) 723-1518. Toll Free: 1.888.33.DYNEX (39639) /
99 Bank Street, Suite 410,	Tel: (949) 733-3005. Fax: (949) 733-2986.
Ottawa, Ontarion, Canada, K1P 6B9 Tel: 613.723.7035	UK, Scandinavia & Rest Of World Tel: +44 (0)1522 500500. Fax: +44 (0)1522 500020
Fax: 613.723.1518	These offices are supported by Representatives and Distributors in many countries world-wide.
Toll Free: 1.888.33.DYNEX (39639)	© Dynex Semiconductor 2001 Publication No. DS5304-3 Issue No. 3.1 January 2001 TECHNICAL DOCUMENTATION – NOT FOR RESALE. PRINTED IN UNITED KINGDOM

#### **Datasheet Annotations:**

Dynex Semiconductor annotate datasheets in the top right hard corner of the front page, to indicate product status. The annotations are as follows:-

Target Information: This is the most tentative form of information and represents a very preliminary specification. No actual design work on the product has been started.

Preliminary Information: The product is in design and development. The datasheet represents the product as it is understood but details may change.

Advance Information: The product design is complete and final characterisation for volume production is well in hand.

No Annotation: The product parameters are fixed and the product is available to datasheet specification.

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior notice the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.

All brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.

Caution: This device is sensitive to electrostatic discharge. Users should follow ESD handling procedures.