


Three Phase Bridge (Power Modules), 90/110 A

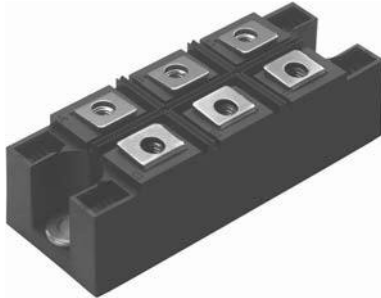

MTK

FEATURES

- Package fully compatible with the industry standard INT-A-PAK power modules series
- High thermal conductivity package, electrically insulated case
- Excellent power volume ratio, outline for easy connections to power transistor and IGBT modules
- 4000 V_{RMS} isolating voltage
- UL E78996 approved
- Totally lead (Pb)-free
- Designed and qualified for industrial level



RoHS
COMPLIANT

PRODUCT SUMMARY

| | |
|-------|----------|
| I_o | 90/110 A |
|-------|----------|

DESCRIPTION

A range of extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and heavy duty applications.

MAJOR RATINGS AND CHARACTERISTICS

| SYMBOL | CHARACTERISTICS | 90MT.K | 110MT.K | UNITS |
|---------------|-----------------|-------------|-----------|-------------------|
| I_o | | 90 (120) | 110 (150) | A |
| | T_c | 90 (61) | 90 (57) | °C |
| I_{FSM} | 50 Hz | 770 | 950 | A |
| | 60 Hz | 810 | 1000 | |
| I^2t | 50 Hz | 3000 | 4500 | A ² s |
| | 60 Hz | 2700 | 4100 | |
| $I^2\sqrt{t}$ | | 30 000 | 45 000 | A ² √s |
| V_{RRM} | Range | 800 to 1600 | | V |
| T_{Stg} | Range | - 40 to 150 | | °C |
| T_J | | | | |

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS

| TYPE NUMBER | VOLTAGE CODE | V_{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V | V_{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V | I_{RRM} MAXIMUM AT $T_J =$ MAXIMUM mA |
|-------------|--------------|--|--|---|
| 90-110MT..K | 80 | 800 | 900 | 10 |
| | 100 | 1000 | 1100 | |
| | 120 | 1200 | 1300 | |
| | 140 | 1400 | 1500 | |
| | 160 | 1600 | 1700 | |

| FORWARD CONDUCTION | | | | | | | |
|---|---------------|---|----------------------------|--------------------------------|-----------|---------------|--------|
| PARAMETER | SYMBOL | TEST CONDITIONS | | 90MT.K | 110MT.K | UNITS | |
| Maximum DC output current at case temperature | I_o | 120° rect. conduction angle | | 90 (120) | 110 (150) | A | |
| | | | | 90 (61) | 90 (57) | °C | |
| Maximum peak, one-cycle forward, non-repetitive surge current | I_{FSM} | t = 10 ms | No voltage reappplied | Initial $T_J = T_J$ maximum | 770 | 950 | A |
| | | t = 8.3 ms | | | 810 | 1000 | |
| | | t = 10 ms | 100 % V_{RRM} reappplied | | 650 | 800 | |
| | | t = 8.3 ms | | | 680 | 840 | |
| Maximum I^2t for fusing | I^2t | t = 10 ms | No voltage reappplied | Initial $T_J = T_J$ maximum | 3000 | 4500 | A^2s |
| | | t = 8.3 ms | | | 2700 | 4100 | |
| | | t = 10 ms | 100 % V_{RRM} reappplied | | 2100 | 3200 | |
| | | t = 8.3 ms | | | 1900 | 2900 | |
| Maximum $I^2\sqrt{t}$ for fusing | $I^2\sqrt{t}$ | t = 0.1 to 10 ms, no voltage reappplied | | 30 000 | 45 000 | $A^2\sqrt{s}$ | |
| Low level value of threshold voltage | $V_{F(TO)1}$ | $(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, T_J maximum | | 0.89 | 0.81 | V | |
| High level value of threshold voltage | $V_{F(TO)2}$ | $(I > \pi \times I_{F(AV)})$, T_J maximum | | 1.05 | 0.99 | | |
| Low level value of forward slope resistance | r_{f1} | $(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, T_J maximum | | 5.11 | 4.37 | $m\Omega$ | |
| High level value of forward slope resistance | r_{f2} | $(I > \pi \times I_{F(AV)})$, T_J maximum | | 4.64 | | | |
| Maximum forward voltage drop | V_{FM} | $I_{pk} = 150$ A, $T_J = 25$ °C $t_p = 400$ μs single junction | | 1.6 | 1.4 | V | |
| RMS isolation voltage | V_{ISOL} | $T_J = 25$ °C, all terminal shorted f = 50 Hz, t = 1 s | | 4000 | | | |

| THERMAL AND MECHANICAL SPECIFICATIONS | | | | | | |
|--|----------------------------|--|--|-------------|---------|---------------|
| PARAMETER | SYMBOL | TEST CONDITIONS | | 90MT.K | 110MT.K | UNITS |
| Maximum junction operating and storage temperature range | T_J, T_{Stg} | | | - 40 to 150 | | °C |
| Maximum thermal resistance, junction to case | R_{thJC} | DC operation per module | | 0.21 | 0.18 | $^{\circ}C/W$ |
| | | DC operation per junction | | 1.26 | 1.07 | |
| | | 120° rect. conduction angle per module | | 0.25 | 0.21 | |
| | | 120° rect. conduction angle per junction | | 1.47 | 1.25 | |
| Maximum thermal resistance, case to heatsink per module | R_{thCS} | Mounting surface smooth, flat and greased | | 0.03 | | |
| Mounting torque ± 10 % | to heatsink to terminal | A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads. | | 4 to 6 | | Nm |
| | | | | 3 to 4 | | |
| Approximate weight | | | | 176 | | g |



Three Phase Bridge
(Power Modules), 90/110 A

Vishay High Power Products

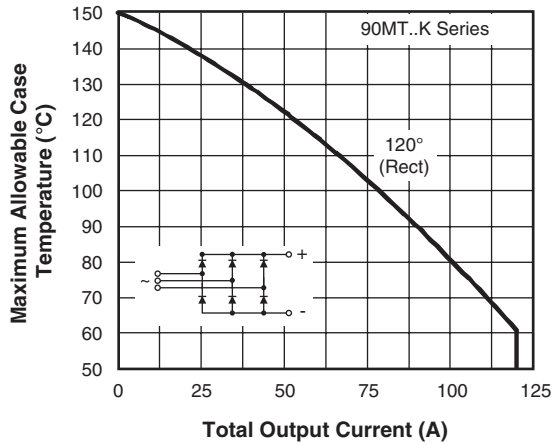


Fig. 1 - Current Ratings Characteristics

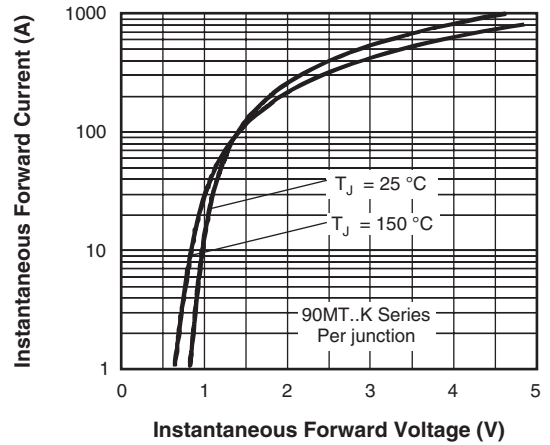


Fig. 2 - Forward Voltage Drop Characteristics

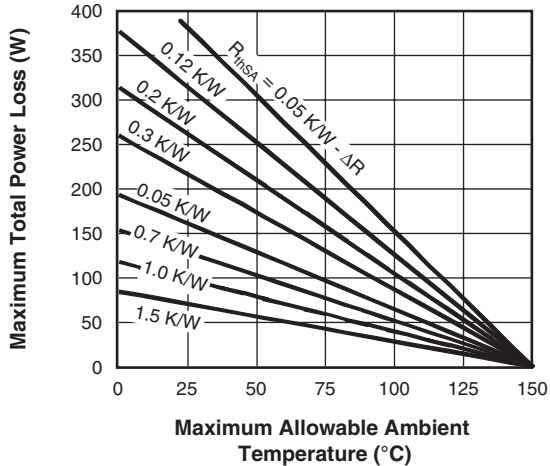
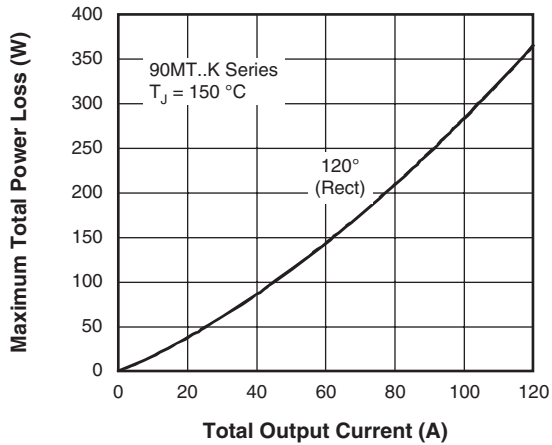


Fig. 3 - Total Power Loss Characteristics

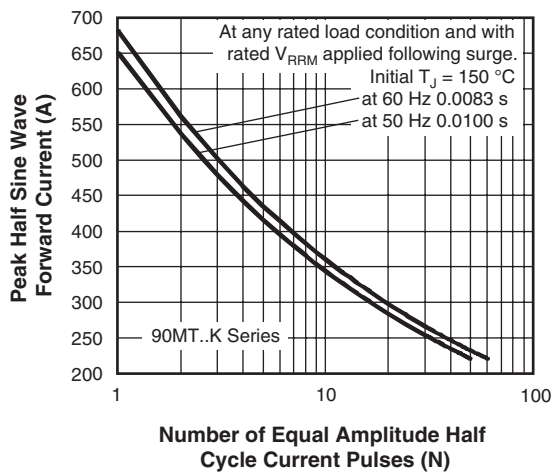


Fig. 4 - Maximum Non-Repetitive Surge Current

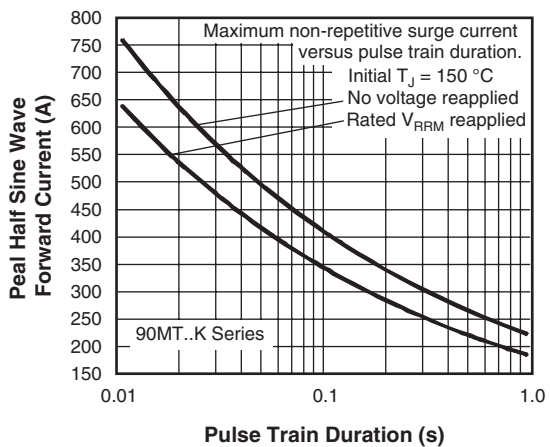


Fig. 5 - Maximum Non-Repetitive Surge Current

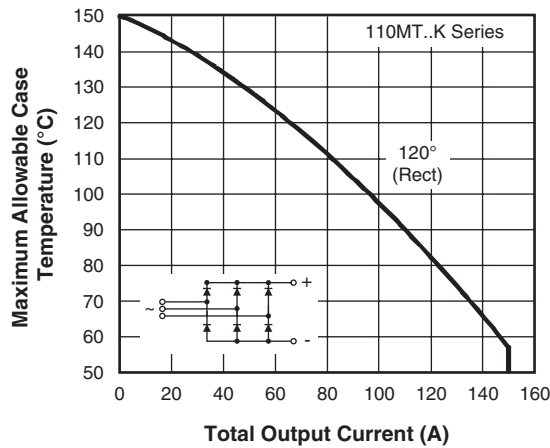


Fig. 6 - Current Ratings Characteristics

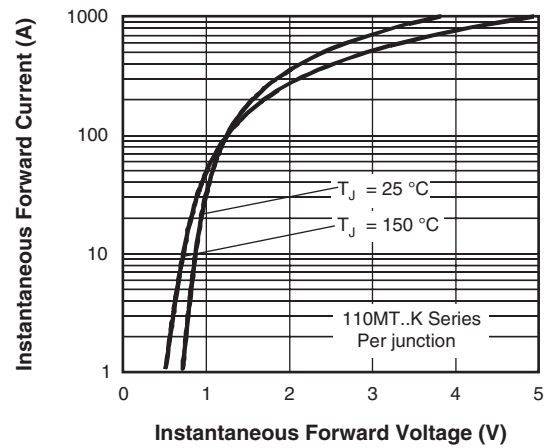


Fig. 7 - Forward Voltage Drop Characteristics

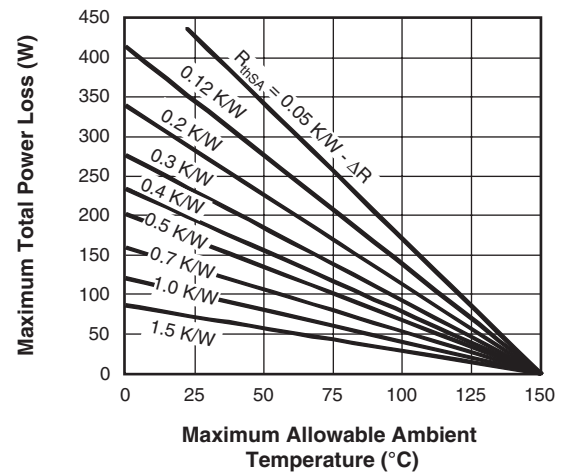
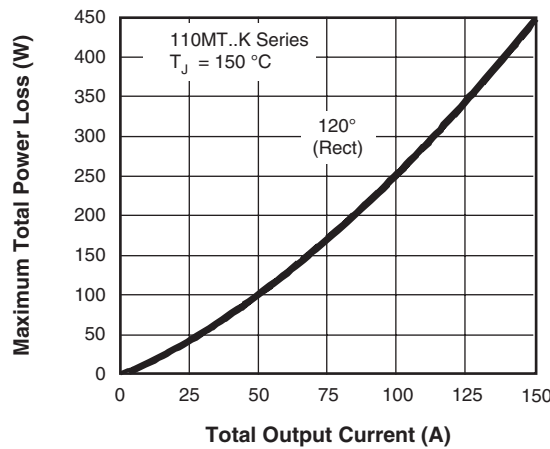


Fig. 8 - Total Power Loss Characteristics

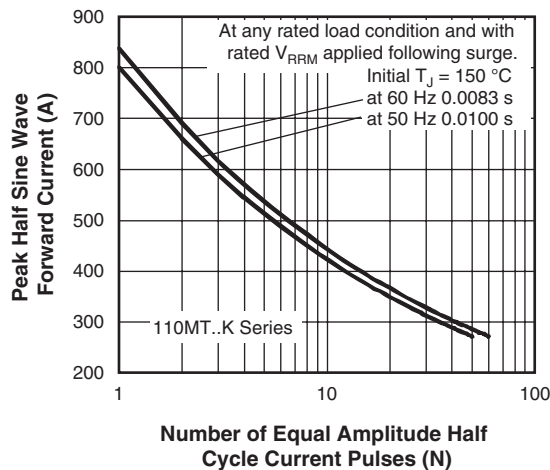


Fig. 9 - Maximum Non-Repetitive Surge Current

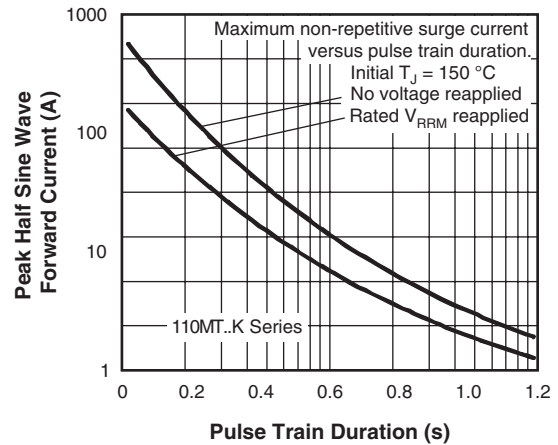


Fig. 10 - Maximum Non-Repetitive Surge Current

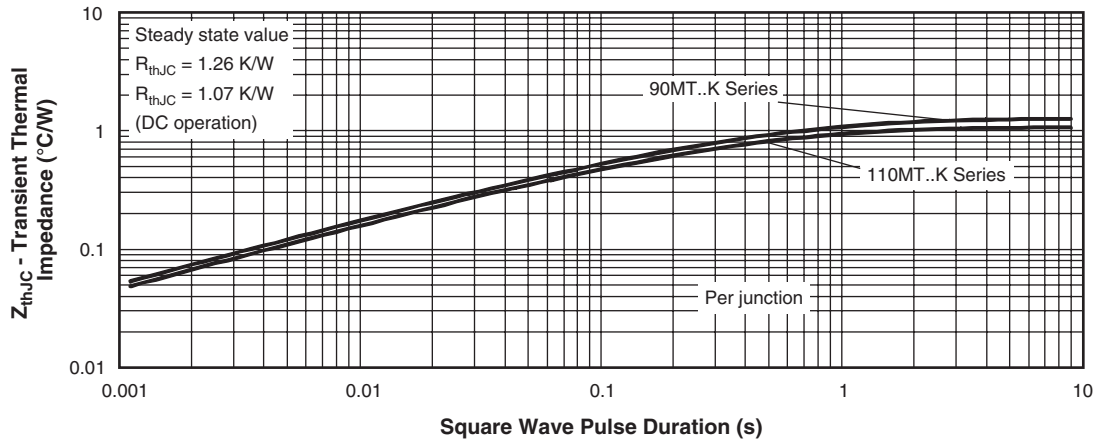


Fig. 11 - Thermal Impedance Z_{thJC} Characteristic

ORDERING INFORMATION TABLE


| | | | | | | |
|-------------|-----------|----------|-----------|------------|----------|------------|
| Device code | 11 | 0 | MT | 160 | K | PbF |
| | (1) | (2) | (3) | (4) | | (5) |

- 1** - Current rating code: 9 = 90 A (average)
11 = 110 A (average)
- 2** - Three phase diodes bridge
- 3** - Essential part number
- 4** - Voltage code x 10 = V_{RRM} (see Voltage Ratings table)
- 5** - PbF = Lead (Pb)-free

Note

- To order the optional hardware go to www.vishay.com/doc?95172

CIRCUIT CONFIGURATION

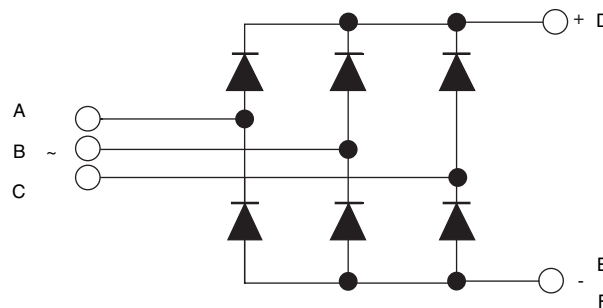

LINKS TO RELATED DOCUMENTS

Dimensions and pin out positions

<http://www.vishay.com/doc?95004>



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.