

### POWER MANAGEMENT

#### Description


The EZ55Z3L voltage regulators are monolithic integrated circuits designed for use in applications requiring a well regulated positive output voltage with low input-to-output differential voltage requirements.

Outstanding features include full power usage up to 250mA of load current, internal current limiting and thermal shutdown. Safe area protection on the die is also included, providing protection of the series pass transistor under most operating conditions. The SOT-223 package is available for cost effective applications.

#### Features

- ◆ External capacitor not required for stability
- ◆ Low dropout performance
- ◆ Fixed 3.3V or adjustable (down to 1.25V) options available
- ◆ Line regulation typically 0.015%
- ◆ Load regulation typically 0.1%
- ◆ SOT-223 package

#### Typical Application Circuits

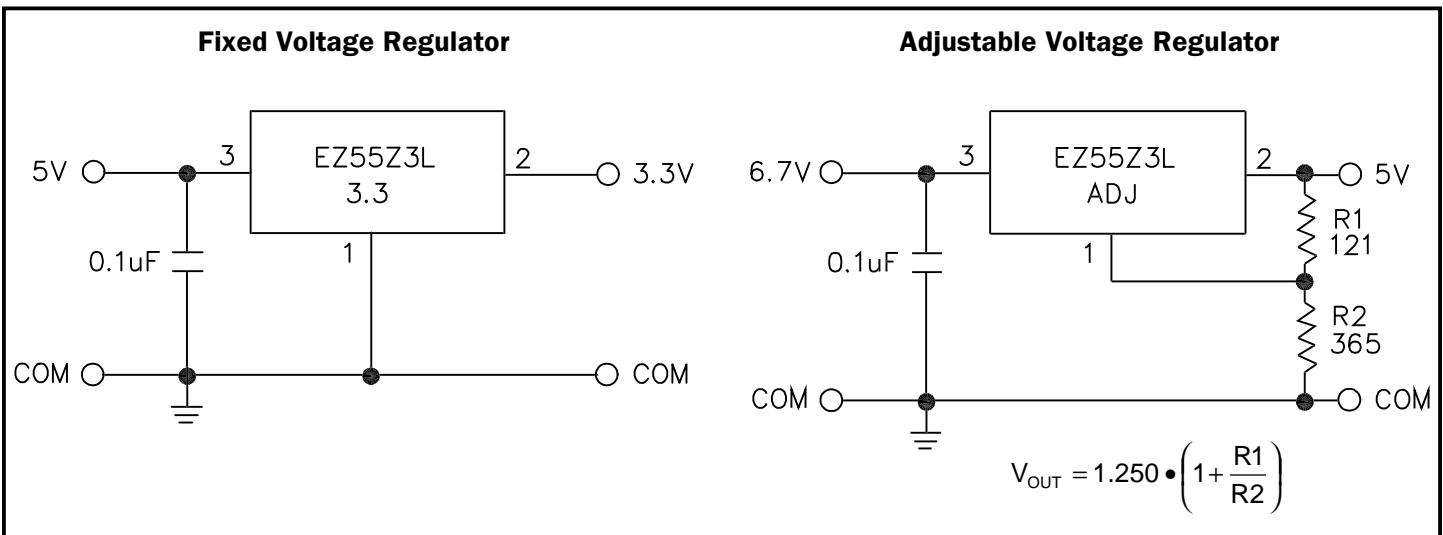

**POWER MANAGEMENT**
**Absolute Maximum Ratings**

Exceeding the specifications below may result in permanent damage to the device, or device malfunction. Operation outside of the parameters specified in the Electrical Characteristics section is not implied.

Parameter	Symbol	Maximum	Units
Operating Input Voltage	$V_{IN}$	$V_{OUT} + 10$	V
Power Dissipation <sup>(1)</sup>	$P_D$	2.5	W
Thermal Resistance Junction to Ambient	$\theta_{JA}$	62.3	°C/W
Thermal Resistance Junction to Case	$\theta_{JC}$	15	°C/W
Operating Junction Temperature Range	$T_J$	0 to 125	°C
Storage Temperature Range	$T_{STG}$	-65 to 150	°C
Lead Temperature (Soldering) 10 Sec.	$T_{LEAD}$	300	°C

**Note:**

(1) Specifications are applicable for a power dissipation of 2.5W and are only achievable over a limited range of  $V_{IN} - V_{OUT}$ .

**Electrical Characteristics**

Unless otherwise specified: ( $V_{IN} - V_{OUT}$ ) = 1.45V to 10V and  $I_{OUT}$  = 10mA to 250mA. Values in **bold** apply over the full operating temperature range.

Parameter	Symbol	Conditions <sup>(1)</sup>	Min	Typ	Max	Units
Output Voltage <sup>(2)</sup>	$V_{OUT}$	$V_{IN} = V_{OUT} + 3V, I_{OUT} = 10mA$	3.201	3.300	3.399	V
3.3V Version			<b>3.168</b>		<b>3.432</b>	
Reference Voltage <sup>(2)</sup>	$V_{REF}$	$V_{IN} = V_{OUT} + 3V, I_{OUT} = 10mA$	1.213	1.250	1.288	V
Adj. Voltage Version			<b>1.200</b>		<b>1.300</b>	
Line Regulation <sup>(2)</sup>	$REG_{(LINE)}$	$I_{OUT} = 10mA$		0.015	0.2	%
				<b>0.035</b>	<b>0.2</b>	
Load Regulation <sup>(2)</sup>	$REG_{(LOAD)}$	$V_{IN} = 3V$		0.1	0.3	%
				<b>0.2</b>	<b>0.4</b>	
Dropout Voltage	$V_D$			<b>1.3</b>	<b>1.5</b>	V
$\Delta V_{OUT}, \Delta V_{REF} = 1\%$						
Surge Current Limit	$I_S$			<b>0.5</b>		A
Quiescent Current	$I_Q$	$V_{IN} = 10V$		<b>10</b>	<b>15</b>	mA
Thermal Regulation <sup>(3)</sup>	$REG_{(THERM)}$			0.002	0.01	%/W

**POWER MANAGEMENT**
**Electrical Characteristics (Cont.)**

Unless otherwise specified: ( $V_{IN} - V_{OUT}$ ) = 1.45V to 10V and  $I_{OUT}$  = 10mA to 250mA. Values in **bold** apply over the full operating temperature range.


Parameter	Symbol	Conditions <sup>(1)</sup>	Min	Typ	Max	Units
Adjust Pin Current	$I_{ADJ}$			55		$\mu$ A
					<b>120</b>	
Adjust Pin Current Change	$\Delta I_{ADJ}$			<b>0.2</b>	<b>5</b>	$\mu$ A
Temperature Stability	$T_S$	$V_{IN} = 5V, I_{OUT} = 250mA$		<b>0.5</b>		%
Minimum Load Current	$I_{OUT}$	$V_{IN} = 10V$		<b>5</b>	<b>10</b>	mA
RMS Output Noise <sup>(4)</sup>	$V_N$			0.003		% $V_{OUT}$
Ripple Rejection Ratio <sup>(5)</sup>	$R_A$	$V_{IN} = 5V, I_{OUT} = 250mA$	<b>60</b>	<b>72</b>		dB

**Notes:**

- (1) Specifications are applicable for a power dissipation of 2.5W and are only achievable over a limited range of  $V_{IN} - V_{OUT}$ .
- (2) Low duty cycle pulse testing with Kelvin connections required. Changes in output voltage due to heating effects are covered under the specification for thermal regulation.
- (3) 30ms pulse.
- (4) Bandwidth of 10Hz to 10kHz
- (5) 120Hz input ripple, 1 dB less for each volt increase above 3.3V Min.;  $C_{OUT}$  &  $C_{ADJ}$  (for ADJ) = 25 $\mu$ F.
- (6) This device is ESD sensitive. Use of standard ESD handling precautions is required.

**POWER MANAGEMENT**

**Pin Configurations**



PIN	FUNCTION
1	ADJ/GND
2	OUT
3	IN

SOT-223 Tab is OUT

SOT-223

**Ordering Information**


Device	Package
EZ55Z3L-SX.TR <sup>(1)(2)</sup>	SOT-223

**Notes:**

(1) Where X denotes voltage options. Available voltage is: 3.3V. Replace X with "ADJ" for adjustable version (1.25 to 24V).


(2) Only available in tape and reel packaging. A reel contains 2500 devices.

**Block Diagram**

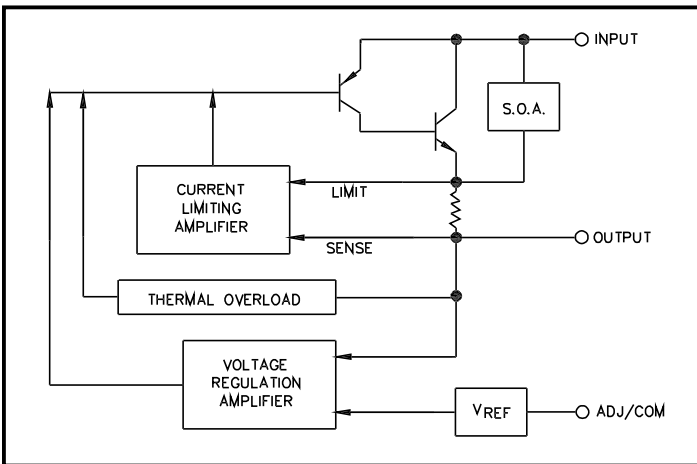


**POWER MANAGEMENT**

**Outline Drawing - SOT-223**

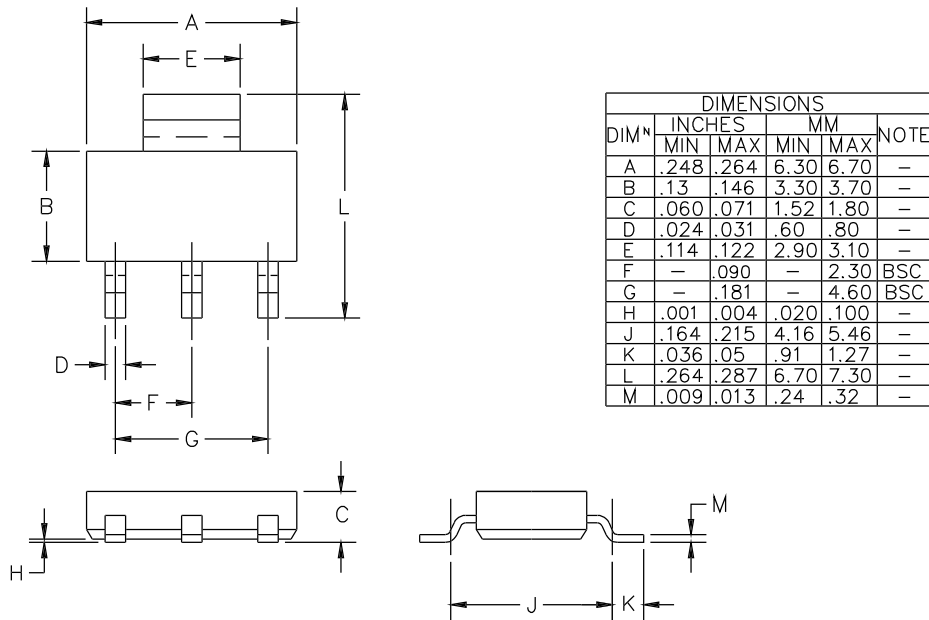

CONTROLLING DIMENSIONS: MILLIMETERS.

**Land Pattern - SOT-223**

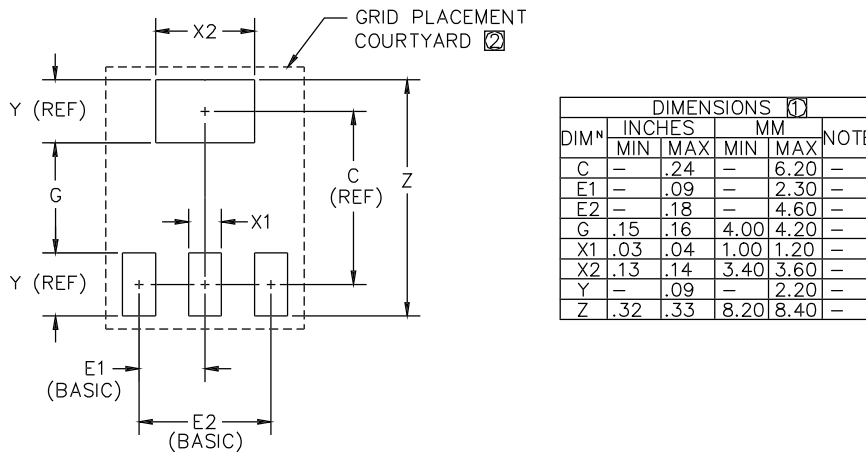

② GRID PLACEMENT COURTYARD IS 18 x 14 ELEMENTS (9 mm X 7mm) IN ACCORDANCE WITH THE INTERNATIONAL GRID DETAILED IN IEC PUBLICATION 97.

① CONTROLLING DIMENSION: MILLIMETERS

**Contact Information**

Semtech Corporation  
 Power Management Products Division  
 200 Flynn Road, Camarillo, CA 93012  
 Phone: (805)498-2111 FAX (805)498-3804