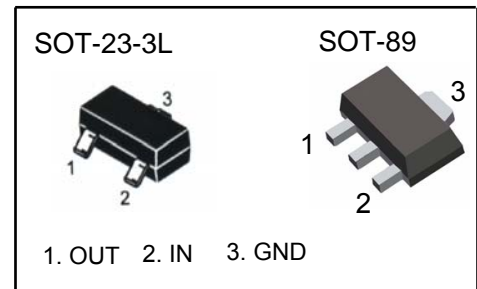


Three-terminal positive voltage regulator

Maximum output current I_o : 0.1 A
 Output voltage V_o : 6 V
 Continuous total dissipation
 P_D : SOT-23-3L 0.35 W ($T_a = 25^\circ\text{C}$)
 SOT-89 0.5 W ($T_a = 25^\circ\text{C}$)



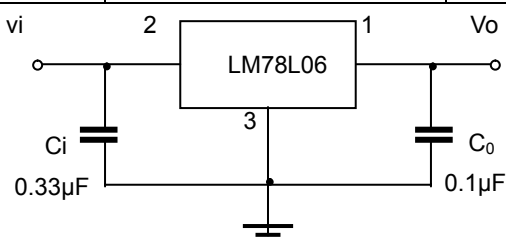
ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	V_i	30	V
Operating Junction Temperature Range	T_{OPR}	0-+125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55-+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i = 11\text{V}$, $I_o = 40\text{mA}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

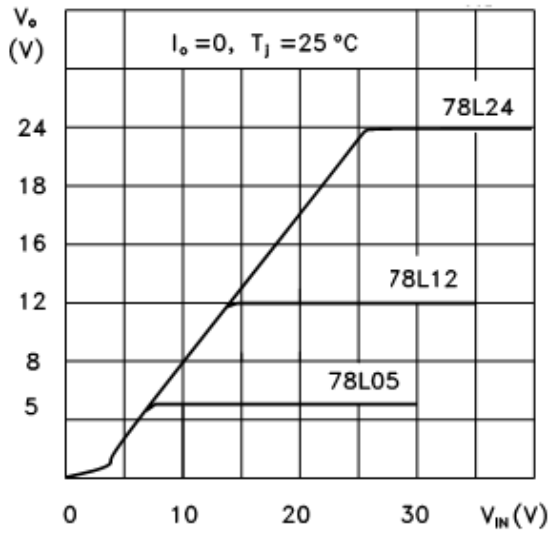
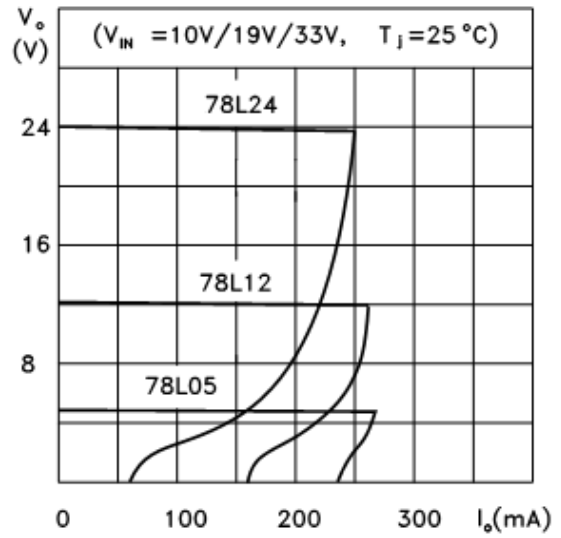
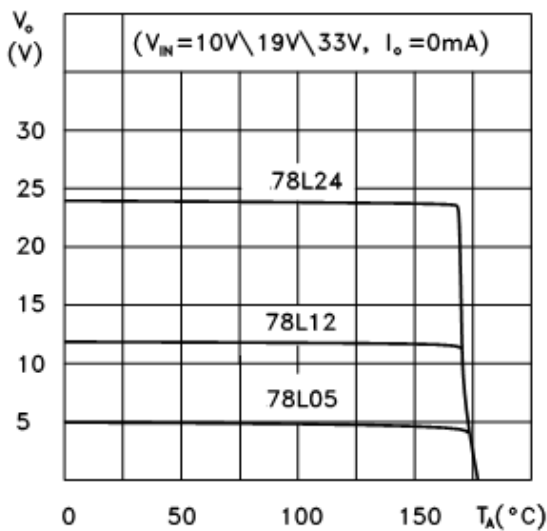
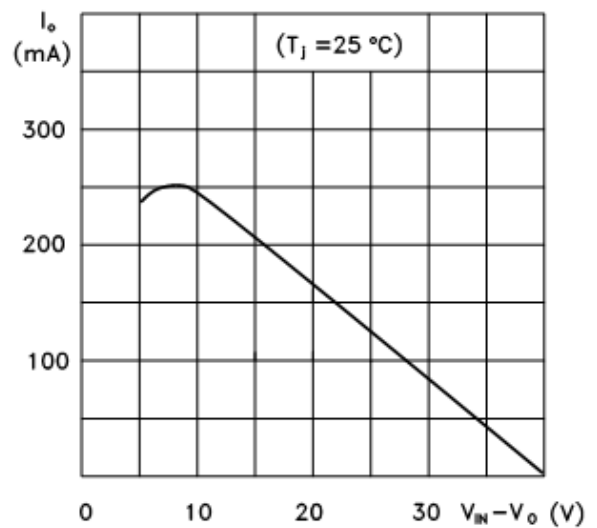
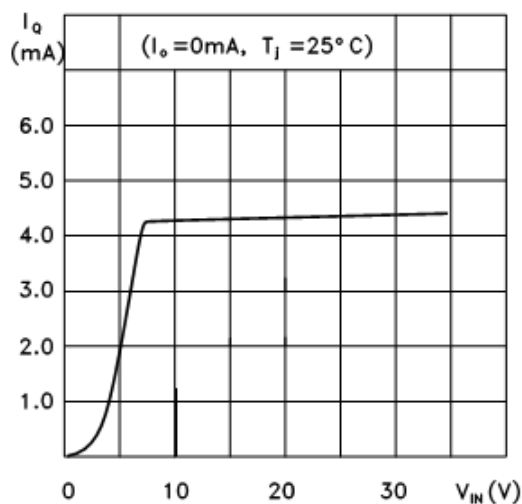
Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT	
Output voltage	V_o	25°C	5.75	6.0	6.25	V	
		0-125 $^\circ\text{C}$	$8\text{V} \leq V_i \leq 20\text{V}$, $I_o = 1\text{mA} - 40\text{mA}$	5.7	6.0	6.3	V
			$I_o = 1\text{mA} - 70\text{mA}$	5.7	6.0	6.3	V
Load Regulation	ΔV_o	$I_o = 1\text{mA} - 100\text{mA}$, 25°C		16	80	mV	
		$I_o = 1\text{mA} - 40\text{mA}$, 25°C		9	40	mV	
Line regulation	ΔV_o	$8\text{V} \leq V_i \leq 20\text{V}$, 25°C		35	175	mV	
		$9\text{V} \leq V_i \leq 20\text{V}$, 25°C		29	125	mV	
Quiescent Current	I_q	25°C		3.9	6.0	mA	
Quiescent Current Change	ΔI_q	$9\text{V} \leq V_i \leq 20\text{V}$, 0-125 $^\circ\text{C}$			1.5	mA	
	ΔI_q	$1\text{mA} \leq I_o \leq 40\text{mA}$, 0-125 $^\circ\text{C}$			0.1	mA	
Output Noise Voltage	V_N	10Hz $\leq f \leq$ 100KHz, 25°C		46		μV	
Ripple Rejection	RR	$9\text{V} \leq V_i \leq 19\text{V}$, $f = 120\text{Hz}$, 0-125 $^\circ\text{C}$	40	48		dB	
Dropout Voltage	V_d	25°C		1.7		V	

TYPICAL APPLICATION



Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics

78L05/12/24 Output Characteristics

78L05/12/24 Load Characteristics

78L05/12/24 Thermal Shutdown

78L00 Series Short Circuit Output Current

78L05 Quiescent Current vs Input Voltage

PD-TA
