

MUR405, MUR410, MUR415, MUR420, MUR440, MUR460

Power Rectifiers

These state-of-the-art devices are a series designed for use in switching power supplies, inverters and as free wheeling diodes.

Features

- Ultrafast 25 ns, 50 ns and 75 ns Recovery Times
- 175°C Operating Junction Temperature
- Low Forward Voltage
- Low Leakage Current
- High Temperature Glass Passivated Junction
- Reverse Voltage to 600 V
- Shipped in Plastic Bags, 500 per Bag
- Available in Tape and Reel, 1500 per Reel, by Adding a “RL” Suffix to the Part Number
- Pb-Free Packages are Available*

Mechanical Characteristics:

- Case: Epoxy, Molded
- Weight: 1.1 Gram (Approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Polarity: Cathode indicated by Polarity Band




KERSEMI

ULTRAFAST RECTIFIERS 4.0 AMPERES, 50–600 VOLTS



**AXIAL LEAD
CASE 267
STYLE 1**

MARKING DIAGRAM



A = Assembly Location
MUR4xx = Device Number
x = 05, 10, 15, 20, 40, 60
YY = Year
WW = Work Week
▪ = Pb-Free Package

(Note: Microdot may be in either location)

MUR405, MUR410, MUR415, MUR420, MUR440, MUR460

MAXIMUM RATINGS

Rating	Symbol	MUR						Unit
		405	410	415	420	440	460	
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	150	200	400	600	V
Average Rectified Forward Current (Square Wave) (Mounting Method #3 Per Note 2)	$I_{F(AV)}$	4.0 @ $T_A = 80^\circ\text{C}$				4.0 @ $T_A = 40^\circ\text{C}$		A
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions, half wave, single phase, 60 Hz)	I_{FSM}	125				110		A
Operating Junction Temperature & Storage Temperature	T_J, T_{stg}	-65 to +175						$^\circ\text{C}$

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

THERMAL CHARACTERISTICS

Rating	Symbol	MUR						Unit
		405	410	415	420	440	460	
Maximum Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	See Note 2						$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS

Rating	Symbol	MUR						Unit
		405	410	415	420	440	460	
Maximum Instantaneous Forward Voltage (Note 1) ($I_F = 3.0\text{ A}$, $T_J = 150^\circ\text{C}$) ($I_F = 3.0\text{ A}$, $T_J = 25^\circ\text{C}$) ($I_F = 4.0\text{ A}$, $T_J = 25^\circ\text{C}$)	V_F	0.71 0.88 0.89				1.05 1.25 1.28		V
Maximum Instantaneous Reverse Current (Note 1) (Rated dc Voltage, $T_J = 150^\circ\text{C}$) (Rated dc Voltage, $T_J = 25^\circ\text{C}$)	i_R	150 5				250 10		μA
Maximum Reverse Recovery Time ($I_F = 1.0\text{ A}$, $di/dt = 50\text{ A}/\mu\text{s}$) ($I_F = 0.5\text{ A}$, $i_R = 1.0\text{ A}$, $I_{REC} = 0.25\text{ A}$)	t_{rr}	35 25				75 50		ns
Maximum Forward Recovery Time ($I_F = 1.0\text{ A}$, $di/dt = 100\text{ A}/\mu\text{s}$, Recovery to 1.0 V)	t_{fr}	25				50		ns
Controlled Avalanche Energy (Maximum)	W_{aval}					5		mJ

1. Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.

MUR405, MUR410, MUR415, MUR420, MUR440, MUR460

ORDERING INFORMATION

Device	Package	Shipping†
MUR405	Axial Lead*	500 Units / Bag
MUR405G	Axial Lead*	
MUR410	Axial Lead*	
MUR410G	Axial Lead*	
MUR410RL	Axial Lead*	1500 / Tape & Reel
MUR410RLG	Axial Lead*	
MUR415	Axial Lead*	500 Units / Bag
MUR415G	Axial Lead*	
MUR415RL	Axial Lead*	1500 / Tape & Reel
MUR415RLG	Axial Lead*	
MUR420	Axial Lead*	500 Units / Bag
MUR420G	Axial Lead*	
MUR420RL	Axial Lead*	1500 / Tape & Reel
MUR420RLG	Axial Lead*	
MUR440	Axial Lead*	500 Units / Bag
MUR440G	Axial Lead*	
MUR440RL	Axial Lead*	1500 / Tape & Reel
MUR440RLG	Axial Lead*	
MUR460	Axial Lead*	500 Units / Bag
MUR460G	Axial Lead*	
MUR460FF	Axial Lead*	500 Units / Bag
MUR460FFG	Axial Lead*	
MUR460RL	Axial Lead*	1500 / Tape & Reel
MUR460RLG	Axial Lead*	

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

*These packages are inherently Pb-Free.

MUR405, MUR410, MUR415, MUR420, MUR440, MUR460

MUR405, MUR410, MUR415, MUR420

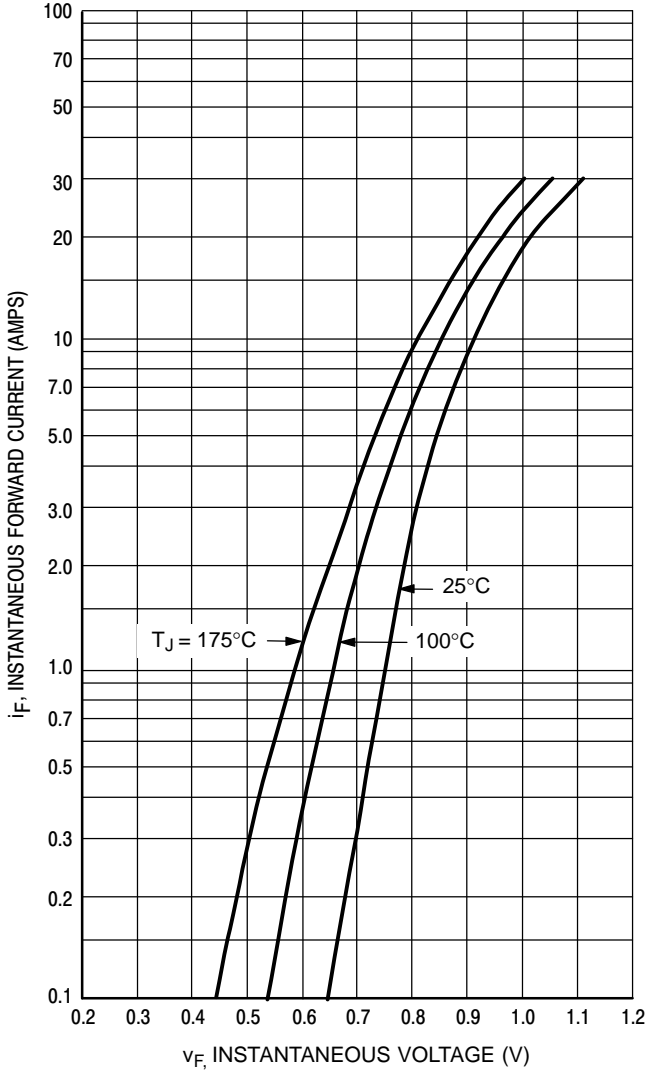


Figure 1. Typical Forward Voltage

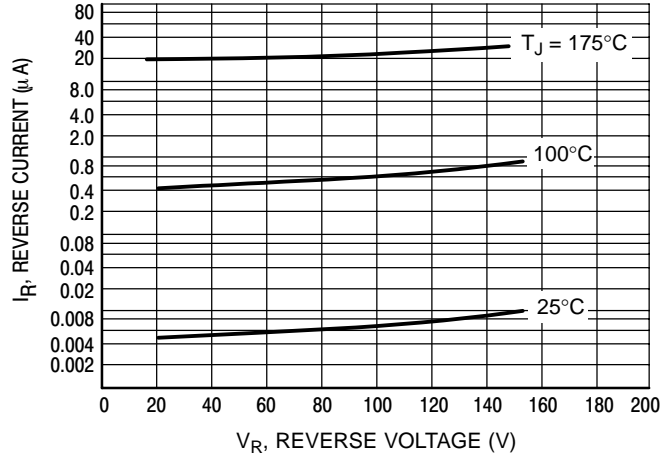


Figure 2. Typical Reverse Current

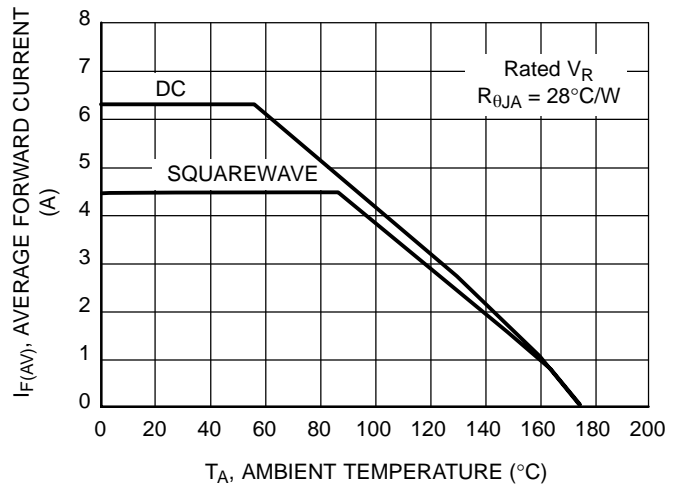


Figure 3. Current Derating
(Mounting Method #3 Per Note 2)

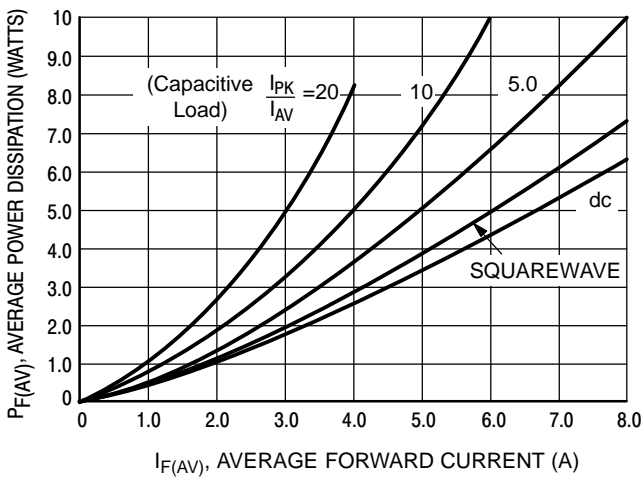


Figure 4. Power Dissipation

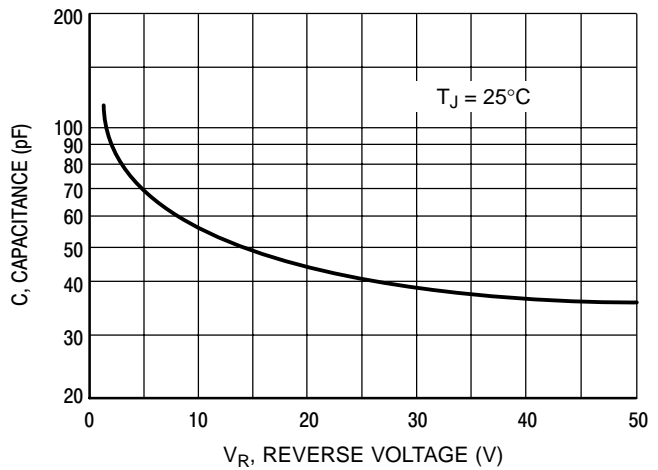


Figure 5. Typical Capacitance

MUR405, MUR410, MUR415, MUR420, MUR440, MUR460

MUR440, MUR460

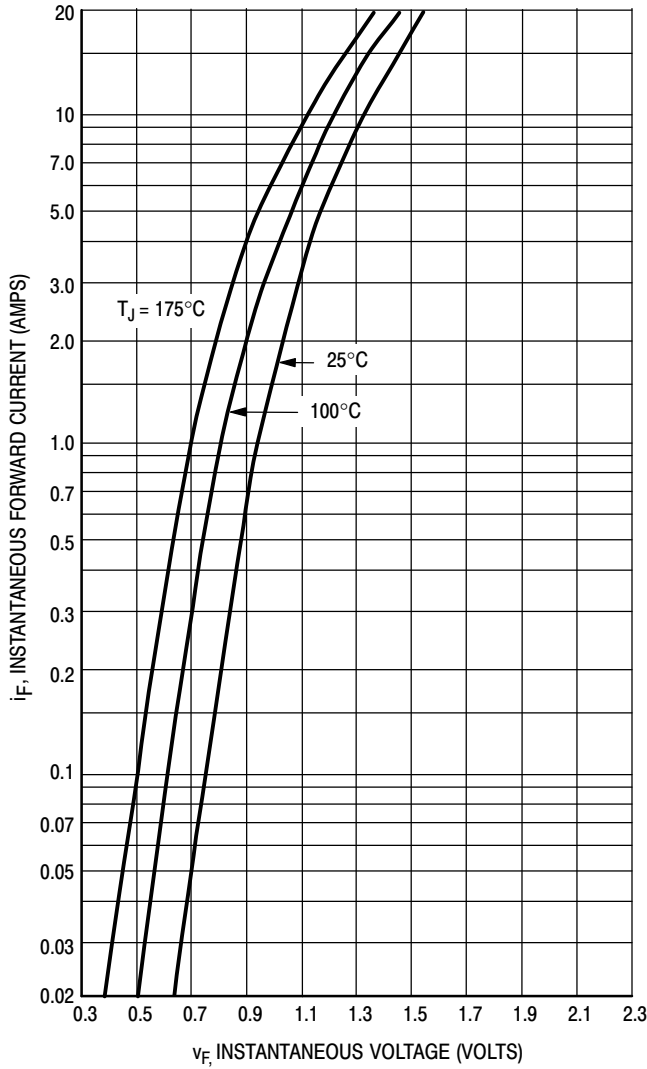


Figure 6. Typical Forward Voltage

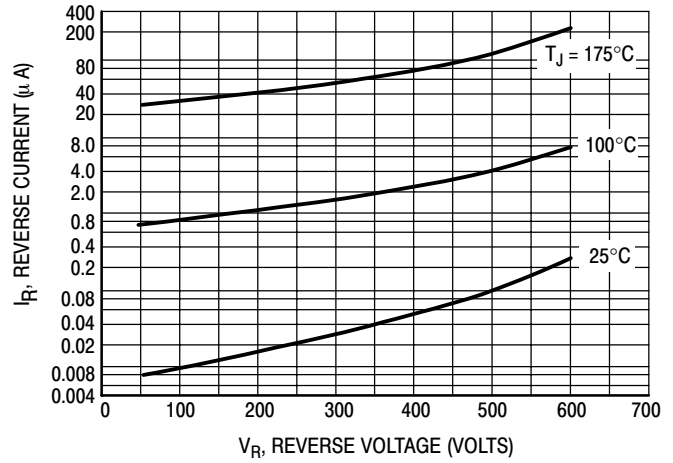


Figure 7. Typical Reverse Current

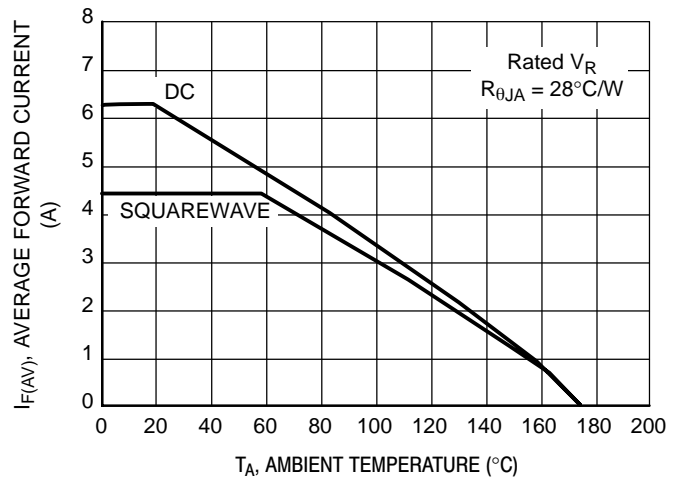


Figure 8. Current Derating
(Mounting Method #3 Per Note 2)

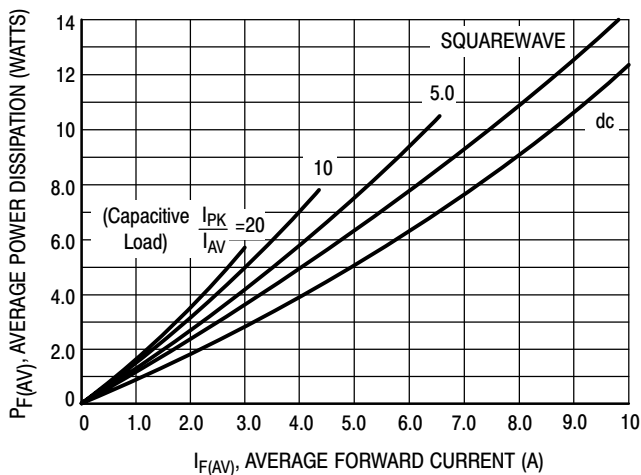


Figure 9. Power Dissipation

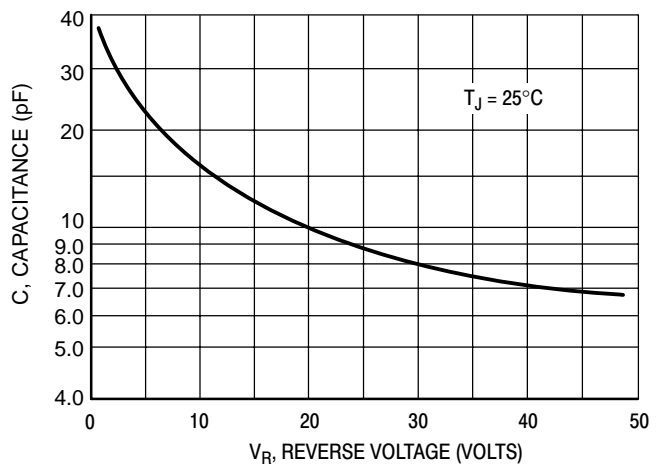


Figure 10. Typical Capacitance

NOTE 2 — AMBIENT MOUNTING DATA


Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.

TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

Mounting Method	$R_{\theta JA}$	Lead Length, L (IN)				Units
		1/8	1/4	1/2	3/4	
1		50	51	53	55	$^{\circ}\text{C}/\text{W}$
2		58	59	61	63	$^{\circ}\text{C}/\text{W}$
3		28				$^{\circ}\text{C}/\text{W}$


MOUNTING METHOD 1

P.C. Board Where Available Copper Surface area is small.

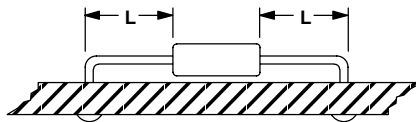


MOUNTING METHOD 2

Vector Push-In Terminals T-28

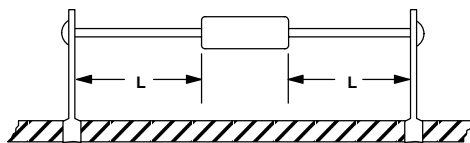

MOUNTING METHOD 3


P.C. Board with 1-1/2" x 1-1/2" Copper Surface

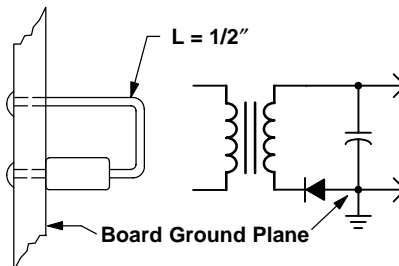

MUR405, MUR410, MUR415, MUR420, MUR440, MUR460

PACKAGE DIMENSIONS

AXIAL LEAD
CASE 267-05
(DO-201AD)
ISSUE G

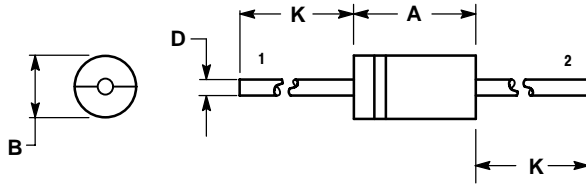

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.287	0.374	7.30	9.50
B	0.189	0.209	4.80	5.30
D	0.047	0.051	1.20	1.30
K	1.000	---	25.40	---

STYLE 1:

- PIN 1. CATHODE (POLARITY BAND)
- PIN 2. ANODE